

Product features

- Built-in non isolated adjustable power LED driver
- Flicker-free LED driver
- Current adjustment via NFC
- Output current 200...700 mA
- Max. output power 100 W
- Constant lumen output (CLO)
- DC emergency
- Current output default value 15 %
- For luminaires with protection class I
- 5-year warranty



Product specifications

161232 ID ELNCB 100/230/200-700 IND NFC

Output current	Input voltage	Output voltage	Efficiency @full load	Current accuracy	Power factor	Dimension LxWxH (mm)
200...700 mA	220...240 Vac 220...240 Vdc	64...290 Vdc	94%	± 5%	0.9	358x30x21

Electrical specifications

Mains voltage supply

Rated input voltage range	220...240 Vac
Max. input voltage range	198...264 Vac
Rated frequency range	0/50/60 Hz
Max. input current	0.52 A @ 230 Vac

Battery operation

DC voltage range	220...240 Vdc
Max. DC voltage range	176...276 Vdc

Protection against voltage peaks

Withstand voltage	l/p-FG: 1.5 kVac, < 5 mA 60 sec
Mains surge immunity	L-N 4 kV, L-FG 4 kV, N-FG 4 kV

Total harmonic distortion (THD)

At rated input voltage range @ full load	10%
--	-----

Output data

Output current tolerance	± 5% at rated input voltage range
No load output voltage	300 Vdc
Ripple output current	5%
Output PstLM	≤ 1 at full load @ rated input voltage
Output SVM	≤ 0.4 at full load @ rated input voltage

Protection functions output side

Overvoltage protection	The output voltage is less than or equal to 300 V
Overpower protection	The output power is less than or equal to 115 W
Short circuit protection	Yes

Connection terminals

Connection terminal type	0° Push in terminal
Wire cross section	Input wire: 0.5...1.5 mm ² and output wire: 0.2...1.5 mm ²
Wire stripping length	8...9 mm

Degree of protection

Protection rating	IP20
-------------------	------

Operating data

Output current range	NFC control adjusts the current: 200...700 mA
Default current	200 mA
Output voltage range	64...290 Vdc
Noise level	< 20 dB, at full load @ 100 cm distance

Circuit breaker / Inrush current

MCB loading quantity	Inrush current I _{peak} : 10.5 A			Inrush current T _{width} : 360 µs	
	MCB type	B10	C10	B16	C16
	Units	16	27	26	44

Supplementary instructions

- The luminaire manufacturer is responsible for measuring and verifying the EMI compliance of the complete luminaire, as the level of radio interference will vary depending on the luminaire construction. Especially primary and secondary cable lengths and their routing may have a significant effect on radio interference.
- Short circuit protection: Hiccup mode. Protection device will trigger when short circuit and will auto recover after the fault mode is removed

Environmental specifications

Operating temperature	-40...+65°C
Storage temperature	-40...+80°C
Working humidity	10%...90%
Store humidity	5%...95%
Lifetime	at Tc 85 °C: 50,000 hrs; at Tc 75 °C: 100,000 hrs; @ 230 Vac
Maximum Tc temperature	90°C

Safety & EMC compliance

ENEC+CE

CCC

SAA


Dimensions

Housing dimensions


Length (L)	358 mm
Width (W)	30 mm
Height (H)	21 mm
Weight	0.238 kg

Packaging details

Packing units	20 pcs
Carton size	381 x 128 x128 mm
Weight	6.15 kg





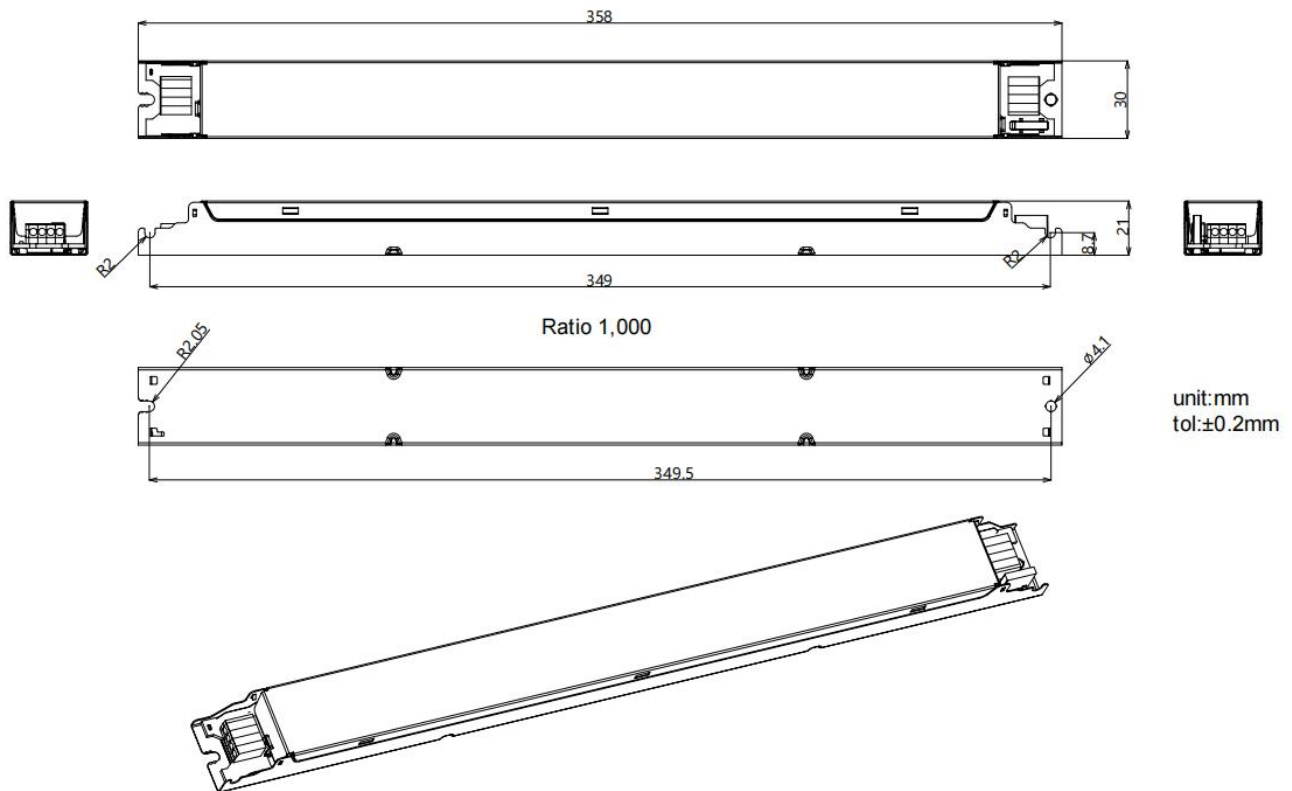


Wiring diagram

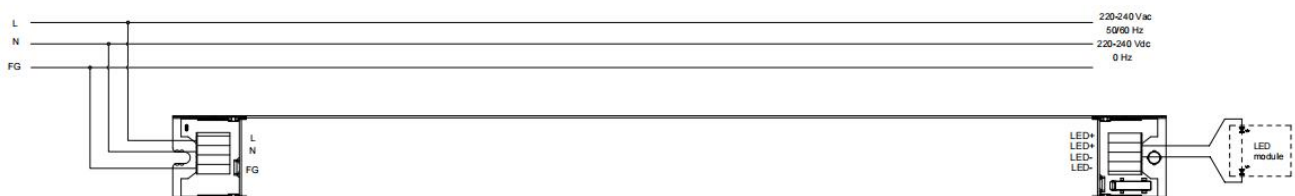

- All connections must be as short as possible to ensure good EMI performance.
- The luminaire wire should keep a certain distance from the LED power supply and other wires (5 - 10 cm is preferred).
- No secondary switches are allowed.
- Incorrect wiring can damage the LED.
- The wire must be well protected against short circuit.

Technical information

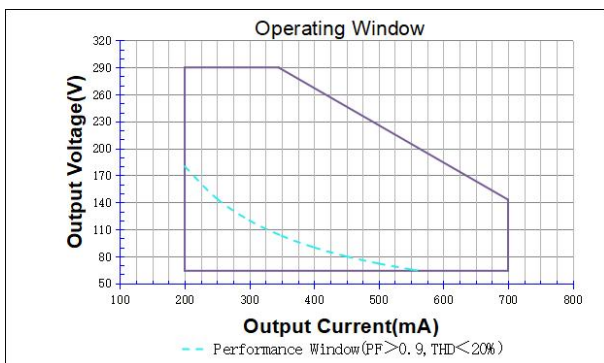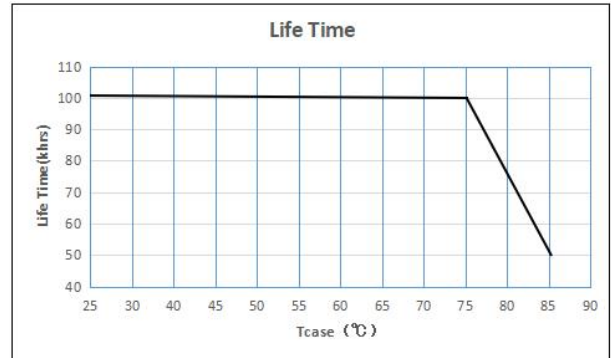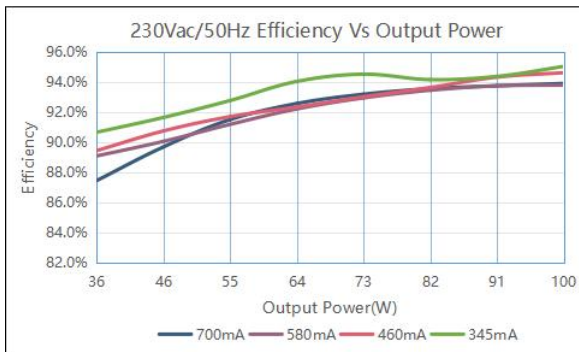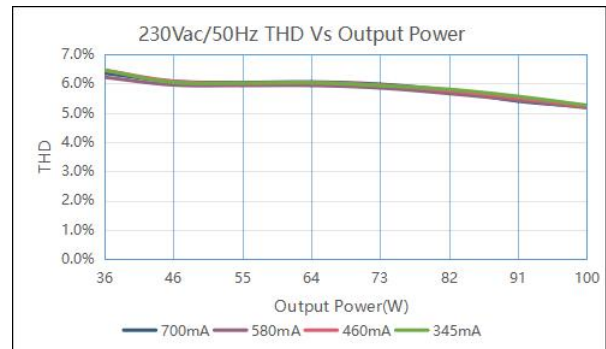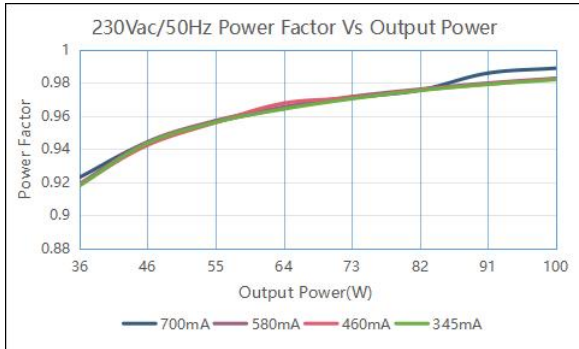

It's important to set the output current (AOC value) according to the LED voltage and make sure the power is within 100W + 5%.

Example of AOC settings

V LED (Vdc)	AOC max	Pout (W)
143	700 mA	100
200	500 mA	100
250	400 mA	100
290	345 mA	100