

Product features



- Independent isolated adjustable power color temperature LED driver
- Flicker-free LED driver
- Supports DALI-2, push dimming, push CCT control
- Usable as DT6 (2-channel) or DT8 (Tunable White) driver
- Current adjustment via NFC
- Output current 150...500 mA
- Max. output power 20 W
- DC emergency : Current output default value 100%
- For luminaires with protection class I,II
- 5 years warranty



Product specifications

160853 ID CCCB 20/230/150-500 DT8 NFC FV1

Output current	Input voltage	Output voltage	Efficiency @full load	Current accuracy	Power factor	Dimension LxWxH (mm)
150 mA	220...240 Vac	10...48 Vdc	76%	± 5%	0.9	109x43x21
250 mA		10...48 Vdc	80%			
350 mA		10...48 Vdc	85%			
500 mA		10...40 Vdc	84%			

Electrical specifications

Mains voltage supply

Rated input voltage range	220...240 Vac
Max. input voltage range	198...264 Vac
Rated frequency range	0/50/60 Hz
Max. input current	0.12 A @ 230 Vac

Protection against voltage peaks

Withstand voltage	I/p-O/p: 3.75 kVac, < 5 mA 60 sec
Mains surge immunity	L-N 1 kV

Total harmonic distortion (THD)

At rated input voltage range @ full load	10%
--	-----

Output data

Output current tolerance	± 5% at rated input voltage range
No load output voltage	60 Vdc
Ripple output current	5% (ripple = peak/average total 100 Hz)
Output PstLM	≤ 1 at full load @ rated input voltage
Output SVM	≤ 0.4 at full load @ rated input voltage

Protection functions output side

Overvoltage protection	The output voltage is less than or equal to 60 V
Overpower protection	The output power is less than or equal to 22 W
Short circuit protection	Yes

Dimming operation and interface

Dimming range	1%...100%
Standby power consumption	< 0.5 W

Connection terminals

Connection terminal type	45° push in terminal
Wire cross section	Input wire: 0.5...1.5 mm ² @ Built-in ; 0.75 - 1.5 mm ² @ Independent ; Output wire: 0.2...1.5 mm ²
Wire stripping length	7...8 mm

Degree of protection

Protection rating	IP20
-------------------	------

Operating data

Output current range	NFC control adjusts the current: 150...500 mA
Default current	150 mA
Output voltage range	10...48 Vdc
Noise level	< 20dB, at full load @ 100 cm distance

Circuit breaker / Inrush current

MCB loading quantity	Inrush current I _{peak} : 4.5 A			Inrush current T _{width} : 38 μs	
	MCB type	B10	C10	B16	C16
Units	73	73	73	117	117

Supplementary instructions

- The luminaire manufacturer is responsible for measuring and verifying the EMI compliance of the complete luminaire, as the level of radio interference will vary depending on the luminaire construction. Especially primary and secondary cable lengths and their routing may have a significant effect on radio interference.
- For the push DIM function, please follow our instructions, which can be downloaded from www.cupower.com.
- Short circuit protection: Hiccup mode. Protection device will trigger when short circuit and will auto recover after the fault mode is removed


Dimensions

Housing dimensions

Length (L)	109 mm
Width (W)	43 mm
Height (H)	21 mm
Weight	0.079 kg

Packaging details


Packing units	24 pcs
Carton size	226 x 144 x 100 mm
Weight	2.5 kg

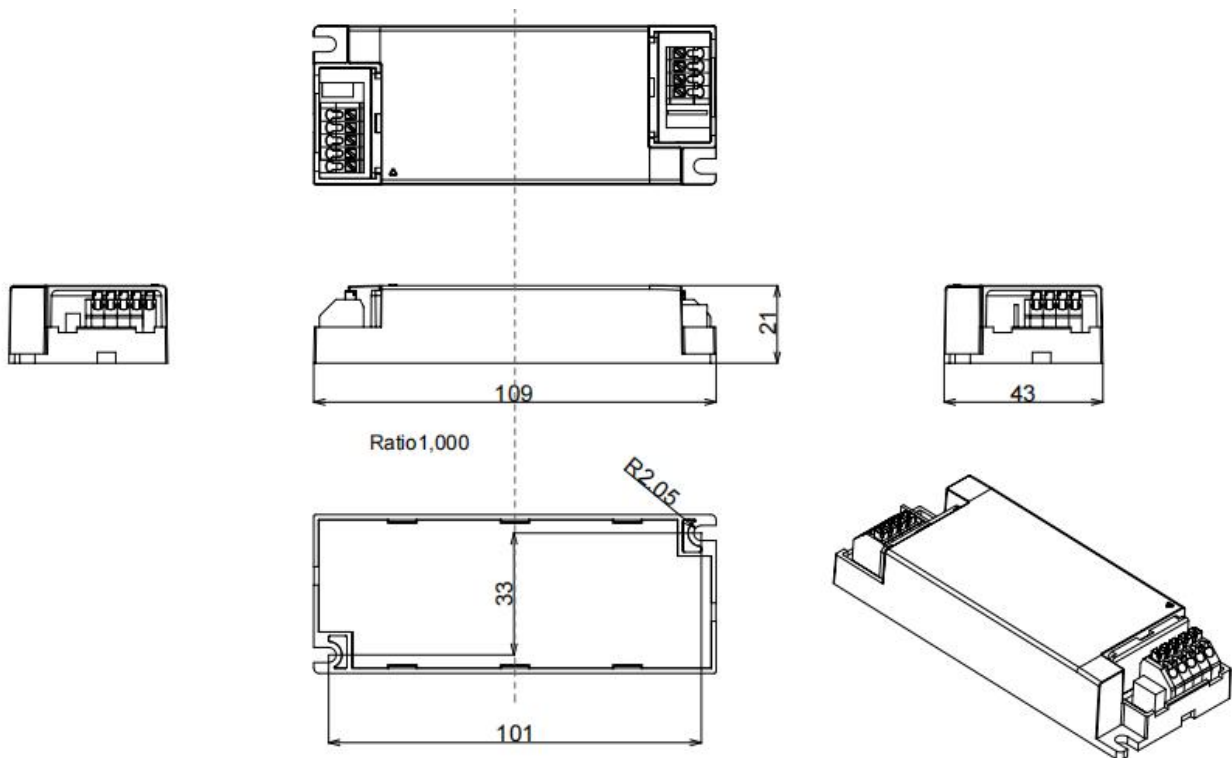



Accessories (optional)



Art 161195 XZ-ID-C




Art 161201 XZ-ID-LOOP-C








Dimensions	Length (mm)	Width (mm)	Height (mm)
XZ-ID-C	39	33	21
XZ-ID-LOOP-C	105	56.5	21
Driver incl. 2 x XZ-ID-C	151	43	21
Driver incl. XZ-ID-C + XZ-ID-LOOP-C	217.5	56.5	21

Wiring diagram

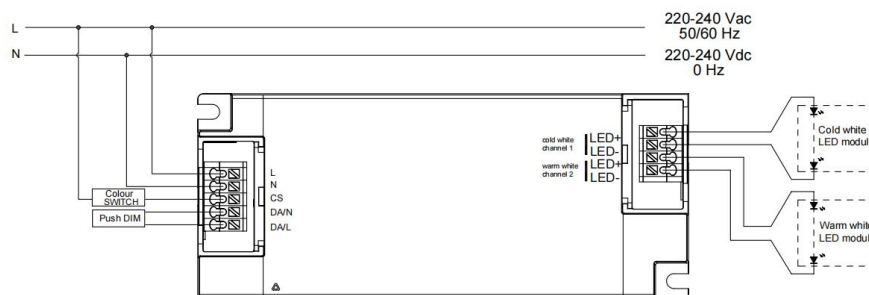

- All connections must be as short as possible to ensure good EMI performance.
- The luminaire wire should keep a certain distance from the LED power supply and other wires (5 - 10 cm is preferred).
- No secondary switches are allowed.
- Incorrect wiring can damage the LED.
- The wire must be well protected against short circuit.

Technical information-DT8

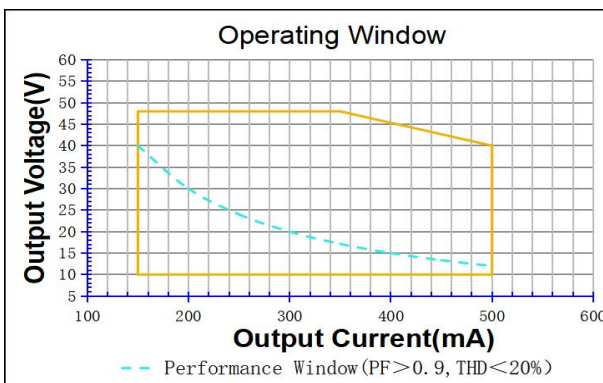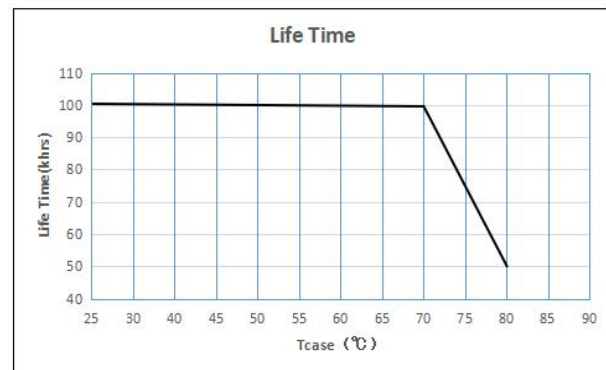
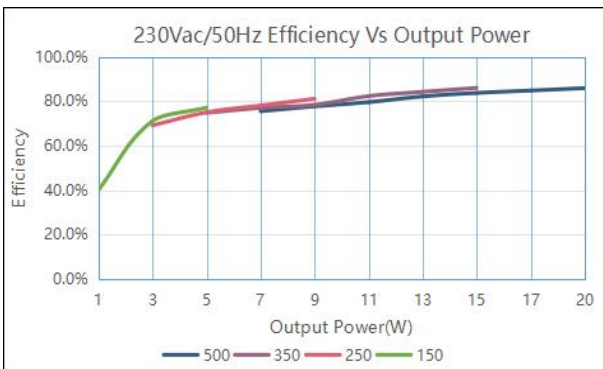
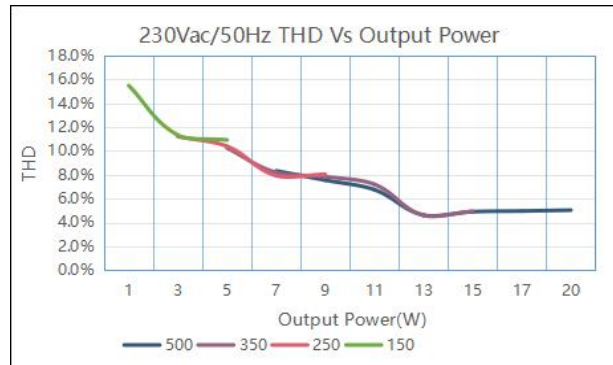
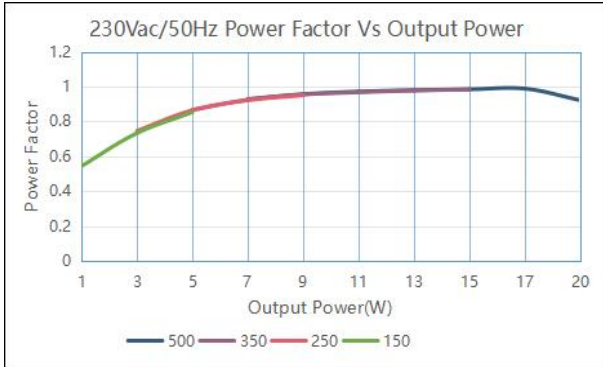


It's important to set the output current (AOC value) according to the LED voltage and make sure the power is within 20 W + 5%.

Example of AOC settings

V LED (Vdc)	AOC max	Pout (W)
48	416 mA	20
45	444 mA	20
42	476 mA	20
40	500 mA	20

Technical information-DT6

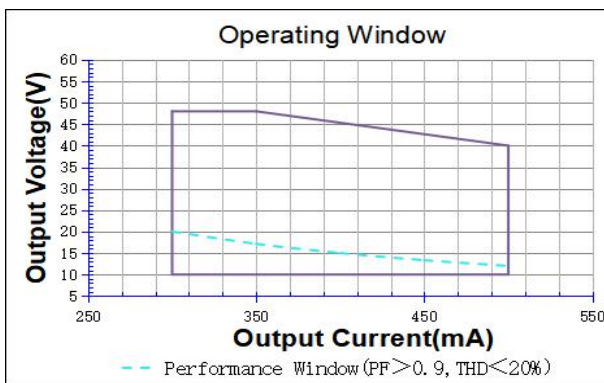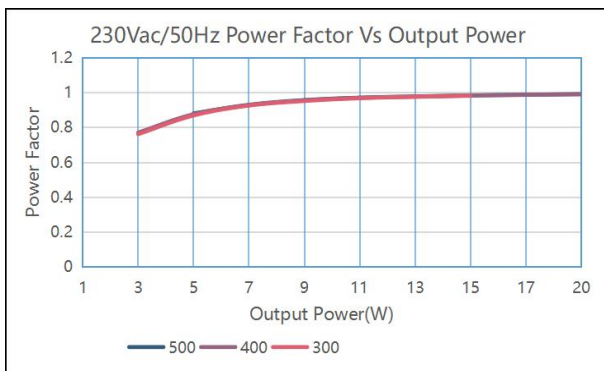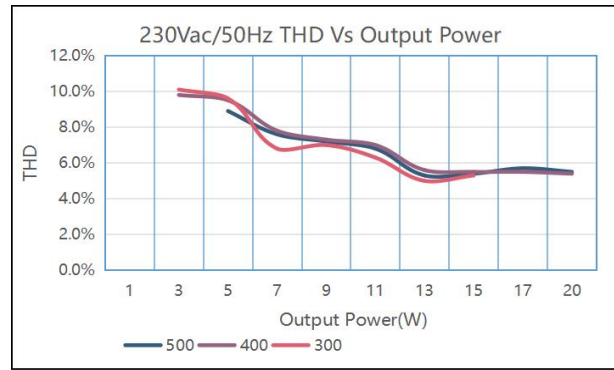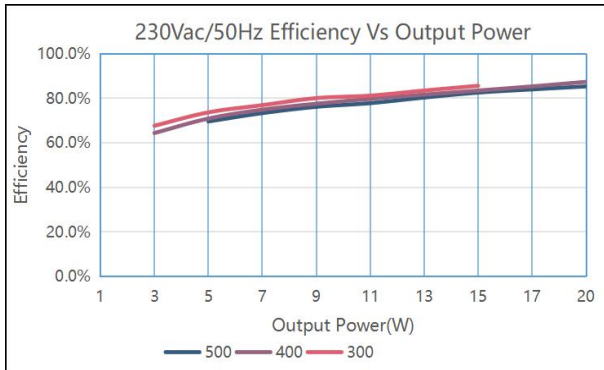

It's important to set the output current (AOC value) according to the LED voltage and make sure the power is within 20 W + 5%.

Example of AOC settings

V LED (Vdc)	AOC max	Pout (W)
48	300 mA	14.4
48	400 mA	19.2
40	500 mA	20