

### Product features

- 1-10V dimming independent LED driver
- Flicker-free LED driver
- DIP control adjusts the current
- Output current 200...350 mA by DIP Switch adjust
- Max. output power 14.7 W
- For luminaires with protection class II
- 5 years warranty



### Product specifications

160310 XZ-CH15B-420035-D

Output current	Input voltage	Output voltage	Efficiency @full load	Current accuracy	Power factor @full load	Dimension LxWxH (mm)
350mA	220...240 Vac	30...42Vdc	83%	± 5%	≥0.9	115x45x29
300mA			83%	±15 mA		
250mA			82%	±15 mA		
200mA			80%	±15 mA		

### Electrical specifications

#### Mains voltage supply

Rated input voltage range	220...240 Vac
Max. input voltage range	198...264 Vac
Rated frequency range	50/60 Hz
Max. input current	0.11 A @ 230 Vac

#### Protection against voltage peaks

Withstand voltage	I/P-O/P: 3.75 kVac, < 5 mA 60 S; I/P-DIM: 3.75 kVac, < 5 mA 60 S; O/P-DIM: 1.6 kVac, < 5 mA 60 S
Mains surge immunity	L-N 0.5 kV

#### Total harmonic distortion (THD)

At rated input voltage range @ full load	≤ 20%
--	-------

#### Output data

Output current tolerance	200...300 mA ± 15 mA at rated input voltage range
Output current tolerance	350 mA ± 5% at rated input voltage range
No load output voltage	≤ 59 Vdc

Ripple output current	5% (ripple = peak/average total 100 Hz)
Output PstLM	≤ 1 at full load @ rated input voltage
Output SVM	≤ 0.4 at full load @ rated input voltage

### Protection functions output side

Short circuit protection	Yes
--------------------------	-----

### Connection terminals

Connection terminal type	45° Push in terminal
Wire cross section	Input wire: 0.75-1.5 mm <sup>2</sup> ; Output wire: 0.5-1.5 mm <sup>2</sup> ; Dimmer wire: 0.5-1.5 mm <sup>2</sup>
Wire stripping length	7...8 mm

### Degree of protection

Protection rating	IP20
-------------------	------

### Operating data

Set output current	DIP Switch adjusts the current: 200-350 mA
Default current	200 mA
Output voltage range	30...42 Vdc
Noise level	< 20dB, at full load @ 100cm distance

### Circuit breaker / Inrush current

MCB loading quantity	Inrush current I <sub>peak</sub> : 8.1 A			Inrush current T <sub>width</sub> : 106.0 μs	
	MCB type	B10	C10	B16	C16
	Units	72	105	115	168

## Supplementary instructions

- The luminaire manufacturer is responsible for measuring and verifying the EMI compliance of the complete luminaire, as the level of radio interference will vary depending on the luminaire construction. Especially primary and secondary cable lengths and their routing may have a significant effect on radio interference.
- For the push DIM function, please follow our instructions, which can be downloaded from [www.cupower.com](http://www.cupower.com).

## Protection

- Over voltage protection: Hiccup mode. Protection will trigger when load voltage exceed specified output voltage and will auto recover after the fault mode is removed.
- Short circuit protection: Hiccup mode. Protection device will trigger when short circuit and will auto recover after the fault mode is removed.

### Environmental specifications

Operating temperature	-20...+45°C
Storage temperature	-25...+85°C
Working humidity	10%...90%
Store humidity	5%...90%
Lifetime	at Tc 75°C: 30,000 hrs; at Tc 65°C: 50,000 hrs; @ 230 Vac
Maximum Tc temperature	75°C

### Safety & EMC compliance

ENEC+CE
EN 61347-1:2015/A1:2021
EN 61347-2-13:2014/A1:2017
EN IEC 62384:2020
EN 61347-1:2015/A1:2021
EN 61347-2-13:2014/A1:2017
EN 62493:2015

CCC
GB 17625.1-2012
GB/T 17743-2021
GB 19510.1-2009
GB 19510.14-2009

SAA
AS/NZS 61347.2.13.2018
AS/NZS 61347.1:2016+A1:2018


### Dimensions

#### Housing dimensions


Length (L)	115 mm
Width (W)	45 mm
Height (H)	29 mm
Weight	0.109 kg

#### Packaging details

Packing units	48 pcs
Carton size	280 x 240 x 151 mm
Weight	5.7 kg

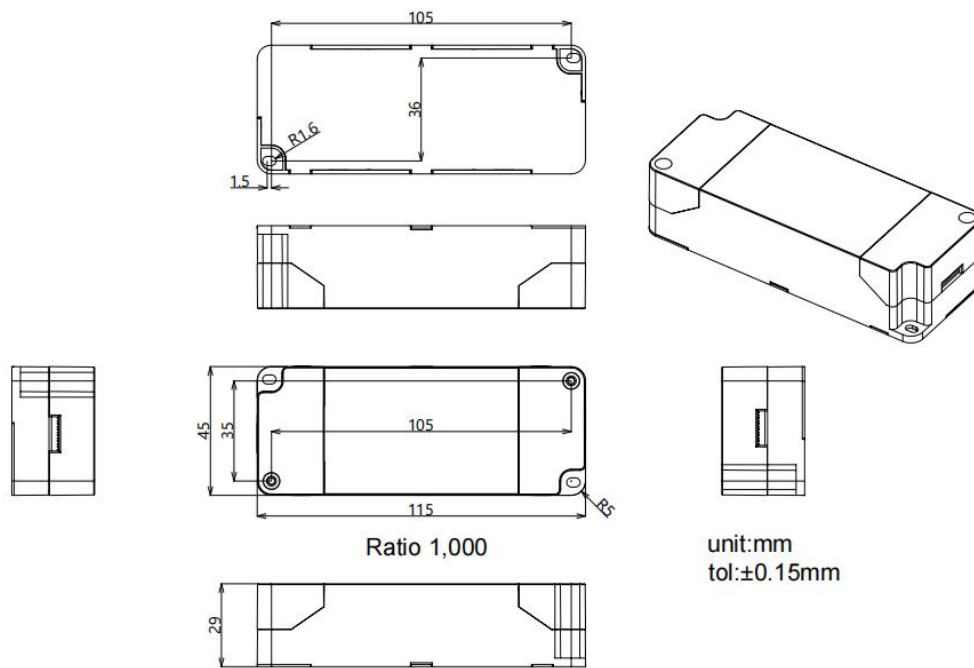

### Wiring diagram

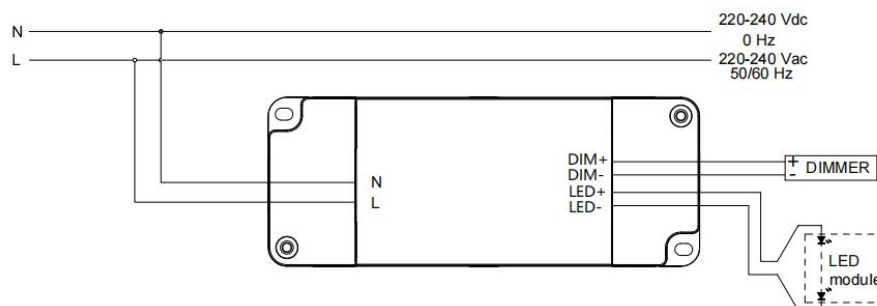

- All connections must be as short as possible to ensure good EMI performance.
- The luminaire wire should keep a certain distance from the LED power supply and other wires (5 - 10 cm is preferred).
- No secondary switches are allowed.
- Incorrect wiring can damage the LED.
- The wire must be well protected against short circuit.

### Technical information

