

### Product features



- Flicker-free LED driver
- Supports DALI-2, push DIM
- Current adjustment via NFC
- Output current 50...400 mA
- Max. output power 36 W
- Current output default value 100%
- For luminaires with protection class I



### Product specifications

160853 ID LCCB 36/230/050-400 DALI NFC FV1

Output current	Input voltage	Output voltage	Efficiency @full load	Current accuracy	Power factor	Dimension LxWxH (mm)
50...400 mA	220...240 Vac 220...240 Vdc	50...137 Vdc	90%	± 5%	0.9	278x30x16

### Electrical specifications

#### Mains voltage supply

Rated input voltage range	220...240 Vac
Max. input voltage range	198...264 Vac
Rated frequency range	0/50/60 Hz
Max. input current	1.5 A @ 230 Vac

#### Battery operation

DC voltage range	220...240 Vdc
Max. DC voltage range	176...276 Vdc

#### Protection against voltage peaks

Withstand voltage	I/p-FG: 1.5 kVac, < 5 mA 60 sec
Mains surge immunity	L-N 4 kV, L-FG 4 kV, N-FG 4 kV

#### Total harmonic distortion (THD)

At rated input voltage range @ full load	10%
--	-----

### Output data

Output current tolerance	± 5% at rated input voltage range
No load output voltage	160 Vdc
Ripple output current	5%(ripple = peak/average total 100 Hz)
Output PstLM	≤ 1 at full load @ rated input voltage
Output SVM	≤ 0.4 at full load @ rated input voltage

### Protection functions output side

Overvoltage protection	The output voltage is less than or equal to 160 V
Overpower protection	The output power is less than or equal to 43 W

### Dimming operation and interface

Dimming mode	DALI-2, Push Dimming
Dimming method	Amplitude dimming
Dimming current range	1%~100%

### Connection terminals

Connection terminal type	0° Push in terminal
Wire cross section	Input and output wire: 0.5...1.5 mm <sup>2</sup>
Wire stripping length	8...9 mm

### Degree of protection

Protection rating	IP20
-------------------	------

### Operating data

Output current range	NFC control adjusts the current: 50...400 mA
Default current	400 mA
Output voltage range	50...137 Vdc

### Circuit breaker / Inrush current

MCB loading quantity	Inrush current I <sub>peak</sub> : 21.3 A			Inrush current T <sub>width</sub> : 142 μs	
	MCB type	B10	C10	B16	C16
	Units	23	38	36	60

## Supplementary instructions

- The luminaire manufacturer is responsible for measuring and verifying the EMI compliance of the complete luminaire, as the level of radio interference will vary depending on the luminaire construction. Especially primary and secondary cable lengths and their routing may have a significant effect on radio interference.
- For the push DIM function, please follow our instructions, which can be downloaded from [www.cupower.com](http://www.cupower.com).

### Environmental specifications

Operating temperature	-25...+55°C
Storage temperature	-40...+85°C
Working humidity	10%...90%
Store humidity	5%...95%
Lifetime	at Tc 75°C: 50,000 hrs @ 230 Vac
Maximum Tc temperature	75°C

### Safety & EMC compliance

ENEC+CE
EN 61347-2-13:2014/A1:2017
EN 61347-1:2015
EN62384:2006/A1:2009
EN55015:2019/A11:2020
EN61000-3-2:2019
EN61000-3-3:2013
EN61547:2009
EN 300 330 v2.1.1:2017

CCC

SAA
AS/NZS IEC 61347.2.13:2013
AS/NZS 61347.1:2016


### Dimensions

#### Housing dimensions


Length (L)	278 mm
Width (W)	30 mm
Height (H)	16 mm
Weight	0.18 kg

#### Packaging details

Packing units	70 pcs
Carton size	312 x 293 x 154 mm
Weight	13 kg




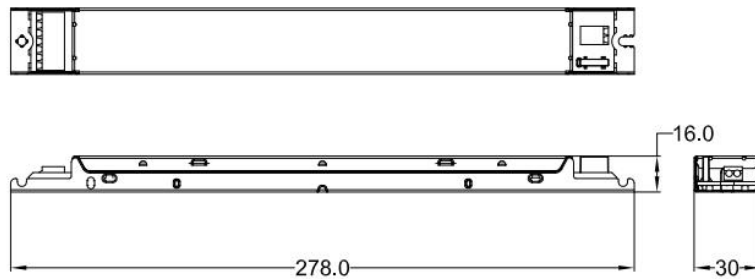


### Wiring diagram

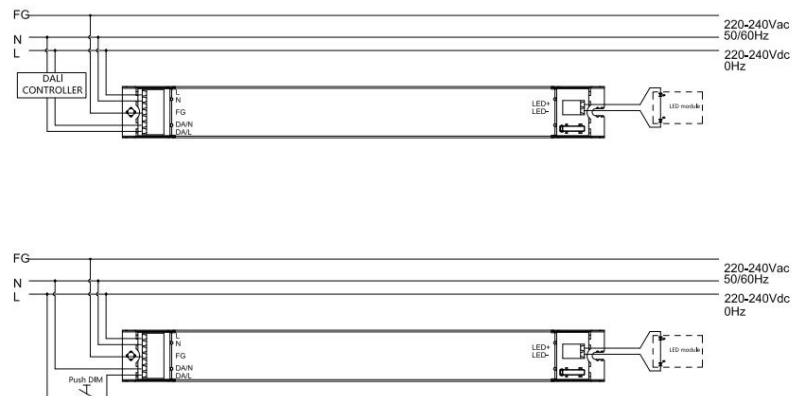

- All connections must be as short as possible to ensure good EMI performance.
- The luminaire wire should keep a certain distance from the LED power supply and other wires (5 - 10 cm is preferred).
- No secondary switches are allowed.
- Incorrect wiring can damage the LED.
- The wire must be well protected against short circuit.

### Technical information

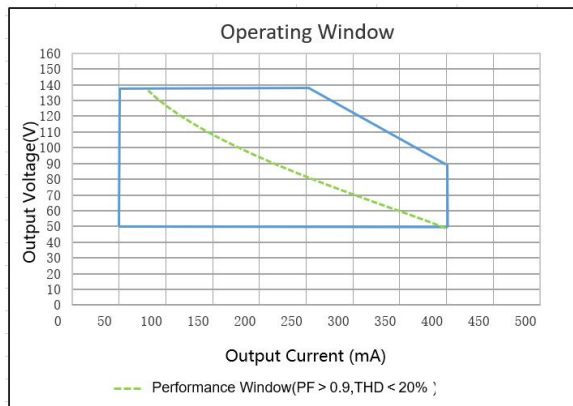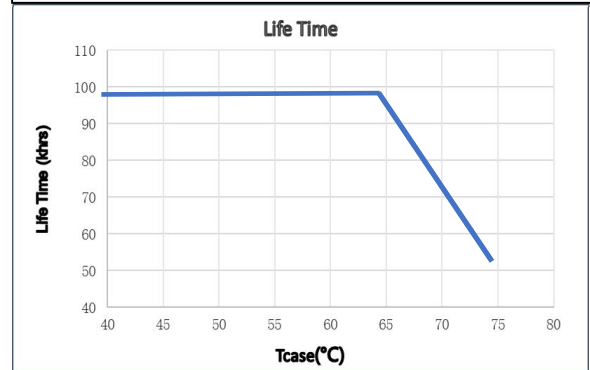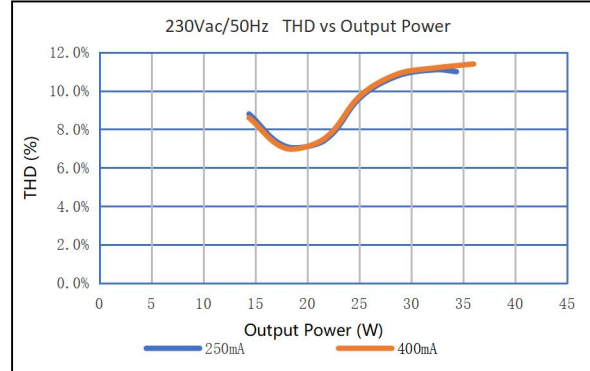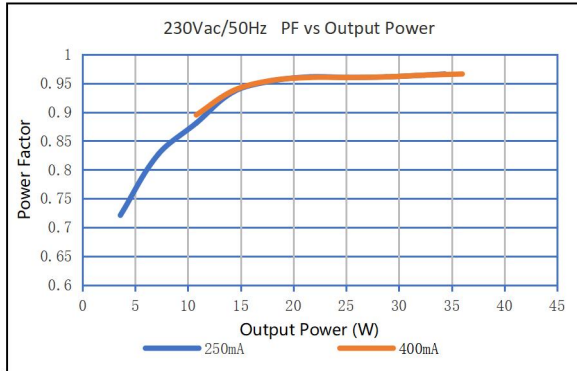

It's important to set the output current (AOC value) according to the LED voltage and make sure the power is within 300 W + 5%.

#### Example of AOC settings

V LED (Vdc)	AOC max	Pout (W)
137	262 mA	36
120	300 mA	36
100	360 mA	36
90	400 mA	36