ID ECSCI 28/230/100-700 NFC ML B

Art.168200

Product features

- Isolated adjustable power LED driver
- Current adjustment via NFC
- Constant lumen output (CLO)
- Output current 100 … 700 mA
- Max. output power 28 W
- DC emergency
- Flicker-free, dimming range 1 … 100 % (amplitude dimming)
- Current output default value 100 %
- For luminaires with protection class II



Product specifications

168200 ID ECSCI 28/230/100-700 NFC ML B

Output current	Input voltage	Output voltage	Efficiency @ full load	Current accuracy	Power factor @ full load	Dimension L x W x H (mm)
100 … 700 mA	220 … 240 VAC 220 … 240 VDC	9 … 42 VDC	89 % (@ 40 V 700 mA)	± 5 %	0.9 (Output Power >10 W @ 230 VAC 50 Hz)	181.5 x 31.1 x 42.2

Electrical specifications

Mains voltage supply	
Rated input voltage range	220 … 240 VAC
Max. input voltage range	198 … 264 VAC
Rated frequency range	0/50/60 Hz
Max. input current	0.15 A @ 230 VAC & 0.15 A @ 230 VDC

Battery operation	
DC voltage range	220 … 240 VDC
Max. DC voltage range	176 … 280 VDC

Protection against voltage peaks	
Withstand voltage	I/p-O/p: 3 kVac, < 5 mA 60 sec, I/p-Da: 1.5 kVac, < 5 mA 60 sec, O/p-Da: 1.5 kVac, < 5 mA 60 sec
Mains surge immunity	L-N 1 kV

Total harmonic distortion (THD)	
At rated input voltage range @ full load	≤ 10 %

Output data	
Output current tolerance	± 5 % at rated input voltage range
No load output voltage	≤ 55 VDC
Ripple output current	5 % (ripple = peak/average total 100 Hz)

Hunan Xiezhen Electronics Co., Ltd.
Block A&B, Building 11, Innovation Park Linyi Road,
Bailutang Town Suxian District, Chenzhou, Hunan - China

CUPOWER Europe GmbH
Ahornweg 5a
58675 Hemer - Germany

Version: 20261111

www.cupower.com

Errors excepted. We reserve the right to make alterations in the interest of improving our products.

Output PstLM	≤ 1 at full load @ rated input voltage
Output SVM	≤ 0.4 at full load @ rated input voltage
DC emergency level	Bluetooth mesh current output decreased to 15 % (programmable)

Protection functions output side

Overvoltage protection	The output voltage is less than or equal to 55 V
Overpower protection	The output power is less than or equal to 31 W
Short circuit protection	Open circuit protection is designed to turn off the output and cannot be automatically restored. After removing the open circuit, the output can be restored by one of the following two operations: • Receive Bluetooth dimming signal and turn on. • Restart the driver: Power on the driver five seconds after the power failure.

Dimming operation and interface

Standby power consumption	< 0.4 W
Dimming mode	AM dimming
Dimming method	Bluetooth mesh dimming
Dimming current range	1 … 100 %

Connection terminals

Connection terminal type	The output terminal is a 45° push-in terminal
Wire cross section	Output wire: 0.5 … 1.5 mm²
Wire stripping length	8 … 9 mm

Degree of protection

Protection rating	IP20

Operating data

Output current range	NFC control adjusts the current: 100 … 700 mA
Default current	100 mA
Output voltage range	9 … 42 VDC

Circuit breaker / Inrush current

MCB loading quantity	Inrush current Ipeak: 23 A			Inrush current Twidth: 135 µs	
	MCB type	B10	C10	B16	C16
	Units	34	57	55	91

Hunan Xiezhen Electronics Co., Ltd.
Block A&B, Building 11, Innovation Park Linyi Road,
Bailutang Town Suxian District, Chenzhou, Hunan - China

CUPOWER Europe GmbH
Ahornweg 5a
58675 Hemer - Germany

Version: 20261111

www.cupower.com

Errors excepted. We reserve the right to make alterations in the interest of improving our products.

Environmental specifications

Operating temperature	-20 … +35 °C
Storage temperature	-25 … +85 °C
Working humidity	10 … 90 %
Storage humidity	5 … 95 %
Lifetime	at Tc 65 °C: 50,000 h @ 230 VAC
Maximum Tc temperature	70 °C

Safety & EMC compliance

ENEC+CE
/
/
/
/
/
/
/

CCC
/
/
/
/
/
/
/

SAA
/
/
/
/
/
/
/

Compatible Track

Manufacturer/trademark	Model
Powergear	PRO-04XX
GLOBAL	XTS 4xxx
GLOBAL	XTSF 4xxx
A.A.G STUCCHI	Series 9000 (Onetrack)
EUTRAC	25-XX-Y 26-XX-Y 19-XX-Y
Unipro	TC312W
ZUMTOBEL	S280ZZZZ
IVELA	75XX-XX-XX
iGuzzini	P2XX
XAL	MOVE IT PRO series

Hunan Xiezhen Electronics Co., Ltd.
Block A&B, Building 11, Innovation Park Linyi Road,
Bailutang Town Suxian District, Chenzhou, Hunan - China


CUPOWER Europe GmbH
Ahornweg 5a
58675 Hemer - Germany

Version: 20261111

www.cupower.com


Errors excepted. We reserve the right to make alterations in the interest of improving our products.

Accessories (optional)

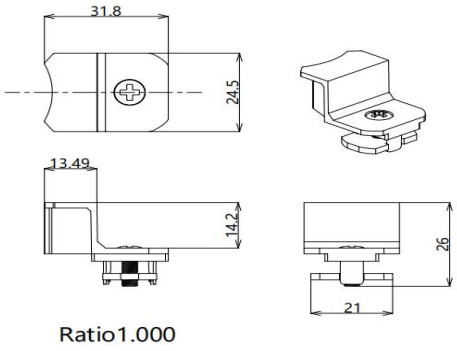




Art. 167838 XZ-TRACK-A B

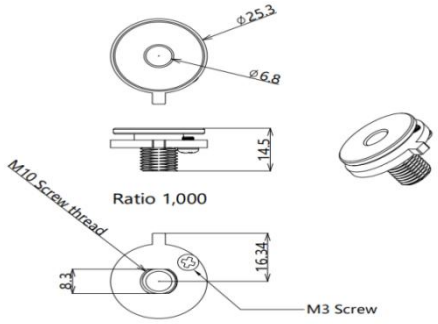



Art. 167852 XZ-TRACK-A1 B

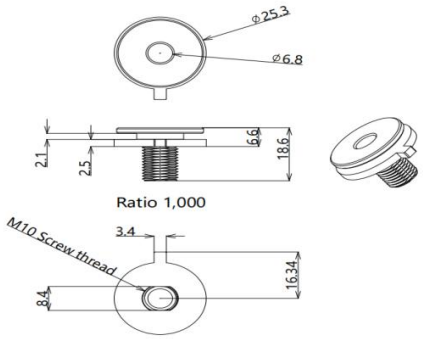



Art. 168132 XZ-TRACK-B B

Dimensions	Length (mm)	Width (mm)	Height (mm)
XZ-TRACK-A B	31.8	24.5	26
XZ-TRACK-A1 B	25.3	25.3	14.5
XZ-TRACK-B B	25.3	25.3	18.6

The first two accessories are designed for EL certification of the entire luminarie.
The third accessory is an optional threaded sleeve for luminarie installation.

Hunan Xiezhen Electronics Co., Ltd.
Block A&B, Building 11, Innovation Park Linyi Road,
Bailutang Town Suxian District, Chenzhou, Hunan - China

CUPOWER Europe GmbH
Ahornweg 5a
58675 Hemer - Germany

Version: 20261111


www.cupower.com

Errors excepted. We reserve the right to make alterations in the interest of improving our products.


Dimensions

Housing dimensions	
Length (L)	181.5 mm
Width (W)	31.1 mm
Height (H)	42.2 mm
For all dimensions: values in mm; tolerances: ± 0.5 mm	

Packaging details	
Packing units	50 pcs
Carton size	339 x 200 x 290 mm
Carton weight	6.6 kg
Product Weight	0.125 kg

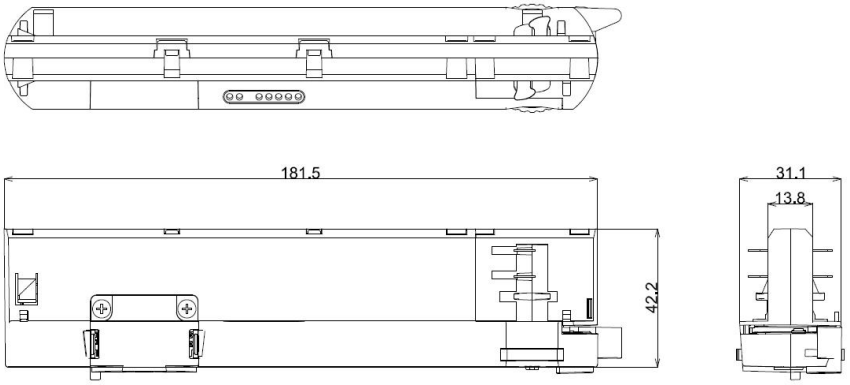

Wiring diagram

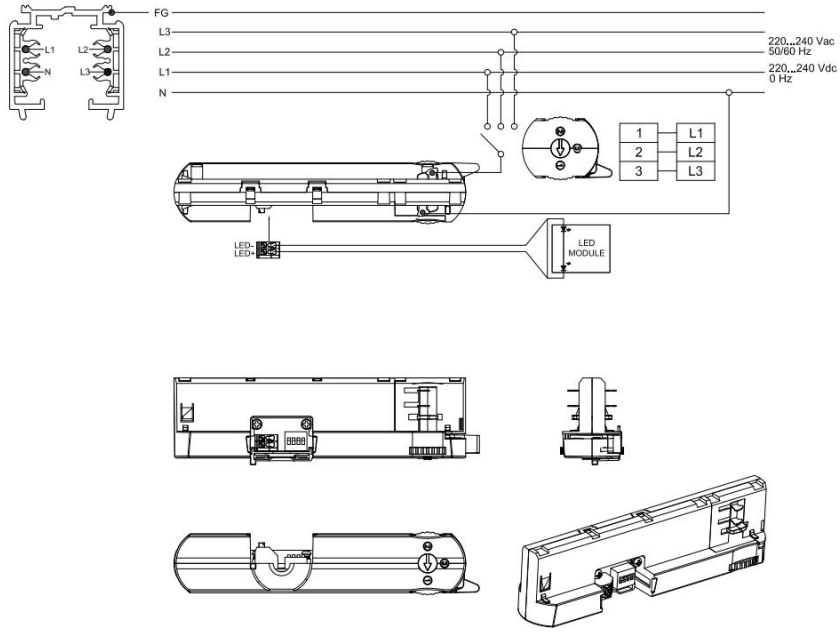

Hunan Xiezhen Electronics Co., Ltd.
Block A&B, Building 11, Innovation Park Linyi Road,
Bailutang Town Suxian District, Chenzhou, Hunan - China

CUPOWER Europe GmbH
Ahornweg 5a
58675 Hemer - Germany

Version: 20261111


www.cupower.com


Errors excepted. We reserve the right to make alterations in the interest of improving our products.


Supplementary instructions


- The luminaire manufacturer is responsible for measuring and verifying the EMI compliance of the complete luminaire, as the level of radio interference will vary depending on the luminaire construction. Especially primary and secondary cable lengths and their routing may have a significant effect on radio interference. All connections must be as short as possible to ensure good EMI performance.
- The luminaire wire should keep a certain distance from the LED power supply and other wires (5 … 10 cm is preferred).
- No secondary switches are allowed.
- Incorrect wiring can damage the LED.
- The wire must be well protected against short circuits.
- The recommended NFC communication distance: 5 … 20 mm.

Technical information

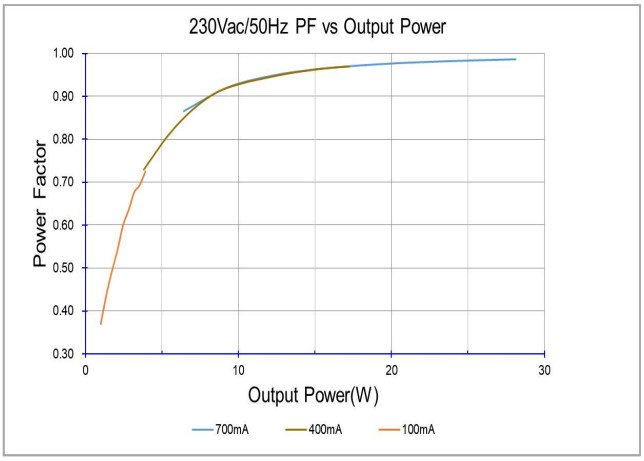

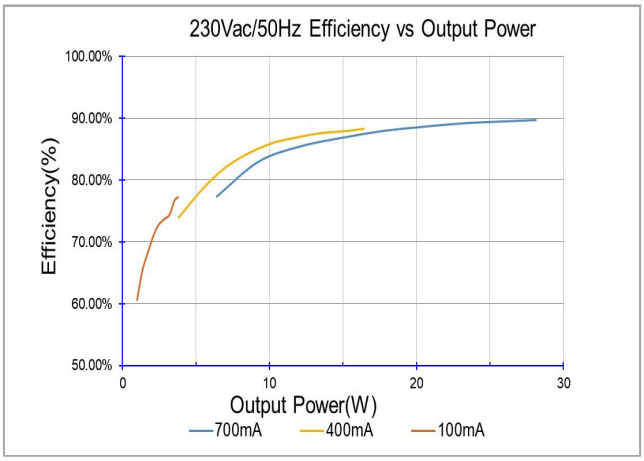

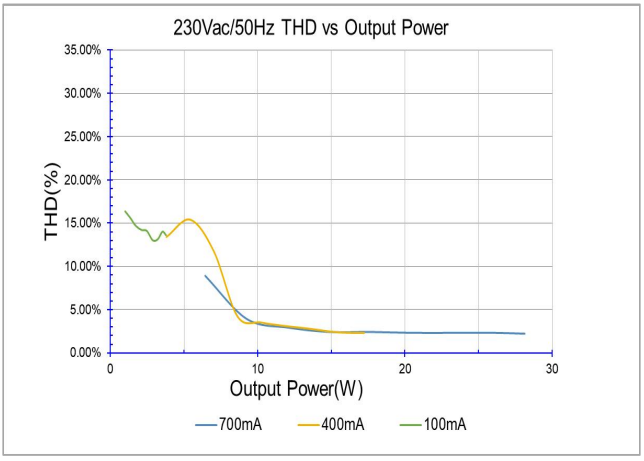

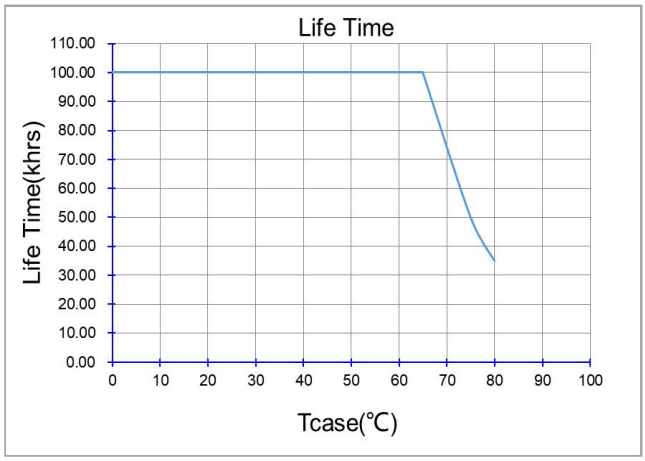


Hunan Xiezhen Electronics Co., Ltd.
Block A&B, Building 11, Innovation Park Linyi Road,
Bailutang Town Suxian District, Chenzhou, Hunan - China

CUPOWER Europe GmbH
Ahornweg 5a
58675 Hemer - Germany

Version: 20261111

www.cupower.com

Errors excepted. We reserve the right to make alterations in the interest of improving our products.

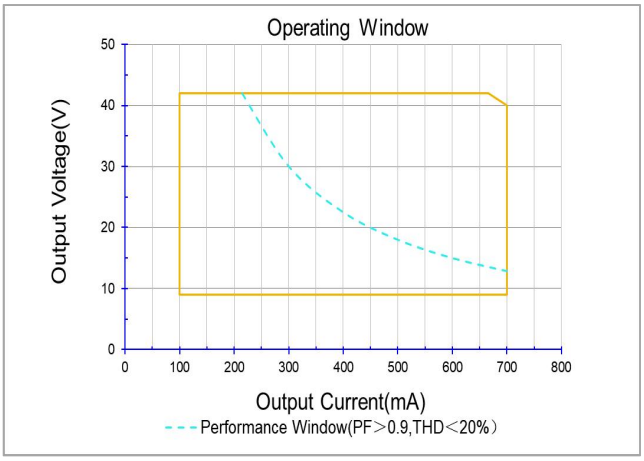

It's important to set the output current (AOC value) according to the LED voltage and make sure the power is within 28 W + 5 %.

Example of AOC settings

V LED (VDC)	AOC max	Pout (W)
42	666 mA	28
30	700 mA	21
40	700 mA	28

Hunan Xiezhen Electronics Co., Ltd.
Block A&B, Building 11, Innovation Park Linyi Road,
Bailutang Town Suxian District, Chenzhou, Hunan - China

CUPOWER Europe GmbH
Ahornweg 5a
58675 Hemer - Germany

Version: 20261111

www.cupower.com

Errors excepted. We reserve the right to make alterations in the interest of improving our products.