


Product features

- Stand alone type dimmable adjustable output power LED driver
- Supports DALI-2, push DIM
- Flicker free LED driver
- Output current 300...1050 mA
- Max. output power 40 W
- Constant lumen output (CLO)
- For luminaires with protection class I, II

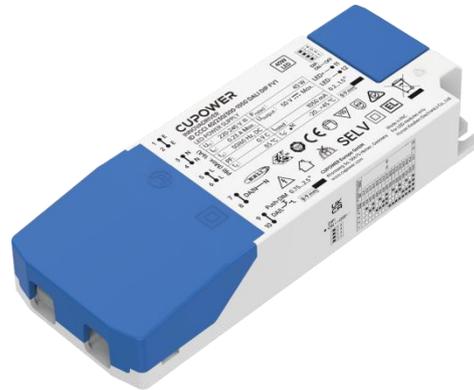

Product specifications

161010 ID CCCI 40/230/300-1050 DALI DIP FV1

Output current	Input voltage	Output voltage	Efficiency @full load	Current accuracy	Power factor	Dimension LxWxH (mm)
300...1000 mA	220...240 Vac 220...240 Vdc	25...40 Vdc	89%	± 5%	0.9 (@ 35...110 W)	170x65x30
1050 mA		25...38 Vdc	89%			

Electrical specifications

Mains voltage supply

Rated input voltage range	220...240 Vac
Max. input voltage range	198...264 Vac
Rated frequency range	0/50/60 Hz
Max. input current	0.23 A @ 230 Vac

Battery operation

DC voltage range	220...240 Vdc
Max. DC voltage range	176...276 Vdc

Protection against voltage peaks

Withstand voltage	I/P-O/P: 3.0 kVac, < 5 mA 60 sec, I/P-DA/P: 1.5 kVac, < 5 mA 60 sec, O/P-DA/P: 1.5 kVac, < 5 mA 60 sec
Mains surge immunity	L-N 1 kV
PushDim surge immunity	L-N 1 kV

Total harmonic distortion (THD)

At rated input voltage range @ full load	15%
--	-----

Output data

Output current tolerance	± 5% at rated input voltage range
No load output voltage	≤ 50 Vdc
Ripple output current	5% (ripple = peak/average total 100Hz)
Output PstLM	1% at full load @ rated input voltage
Output SVM	0.4% at full load @ rated input voltage
Starting time (AC)	≤ 660 ms
Leakage current	< 0.7 mA
Noise (dB)	< 20 dB, at full load @ 100cm distance
DC emergency level	DALI current output decreased to 15% (DALI commands can be configured according to customer needs)
Emergency light	Switching time AC-DC: Stable current consumption within 1.6 s Automatic restart DC-AC with standard starting time: ≤660 ms
Driver switching cycles	100000 cycles

Protection functions output side

Overvoltage protection	The output voltage is less than or equal to 50 V
Overpower protection	The output power is less than or equal to 44 W
Short circuit protection	Hiccup mode • Protection device will trigger when short circuit and will auto recover after the fault mode is removed
Over-Temperature Protection	Protection device will trigger when ambient temperature rises to 80 °C. Automatic recovering

Dimming operation and interface

Standby power consumption	≤ 0.5 W
Dimming mode	DALI-2, push dimming
Dimming method	Amplitude dimming
Dimming current range	1%~100%
DALI performance	EN 62386-101, 102, 207, 251, 252, 253

Connection terminals

Connection terminal type	Push in terminal
Wire cross section	Primary side: 0.75-2.5 mm ² secondary side: 0.2 - 1.5 mm ²
Wire stripping length	8...9 mm

Degree of protection

Protection rating	IP20
-------------------	------

Operating data

Output current range	DIP switch control adjusts the current: 300...1050 mA
Default current	300 mA
Output voltage range	25...40 Vdc

Circuit breaker / Inrush current

MCB loading quantity	Inrush current I _{peak} : 5.6 A		Inrush current T _{width} : 50 µs		
	MCB type	B10	C10	B16	C16
	Units	37	37	59	59

Supplementary instructions

- The luminaire manufacturer is responsible for measuring and verifying the EMI compliance of the complete luminaire, as the level of radio interference will vary depending on the luminaire construction. Especially primary and secondary cable lengths and their routing may have a significant effect on radio interference.
- For the push DIM function, please follow our instructions, which can be downloaded from www.cupower.com.

Environmental specifications

Operating temperature	-20...+45°C
Storage temperature	-40...80°C
Working humidity	10%...90%
Store humidity	5%...90%
Lifetime	at T _c 80°C: 50,000 hrs @ 230 Vac
Maximum T _c temperature	85°C

Safety & EMC compliance

ENEC+CE	CCC	SAA
EN 61347-2-13:2014+A1: 2017		AS/NZS IEC 61347.2.13: 2018
EN 61347-1:2015+A1: 2021		AS/NZS 61347.1:2016+A1: 2018
EN 62384: 2020		
EN 55015:2019/A11: 2020		
EN 61000-3-2:2019/A1: 2021		
EN 61000-3-3:2013/A2: 2021		
EN 61547: 2009		



Dimensions

Housing dimensions


Length (L)	170 mm
Width (W)	65 mm
Height (H)	30 mm
Weight	0.203 kg

Packaging details

Packing units	57 pcs.
Carton size	353 x 335 x 220 mm
Weight	12.5 kg

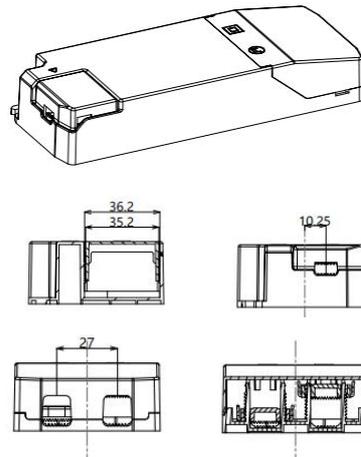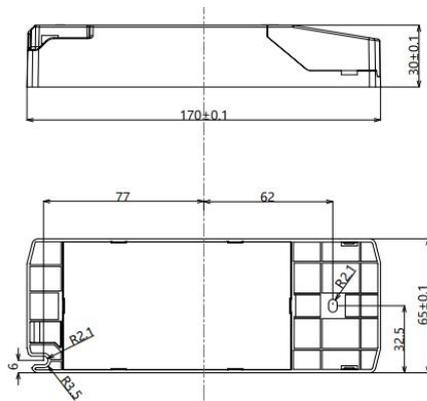

Wiring diagram




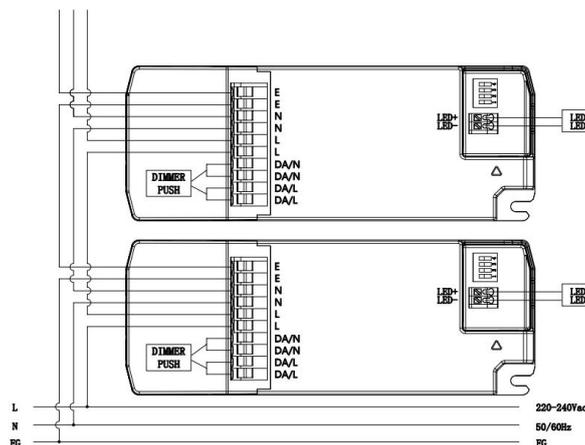


- All connections must be as short as possible to ensure good EMI performance.
- The luminaire wire should keep a certain distance from the LED power supply and other wires (5 - 10 cm is preferred).
- Incorrect wiring can damage the LED.
- The wire must be well protected against short circuit.

Adjustable output current with DIP switch

Vout	Pout	Iout	1	2	3	4
25-40Vdc	12W	300mA	-	-	-	-
25-40Vdc	14W	350mA	-	-	-	ON
25-40Vdc	16W	400mA	-	-	ON	-
25-40Vdc	18W	450mA	-	-	ON	ON
25-40Vdc	20W	500mA	-	ON	-	-
25-40Vdc	22W	550mA	-	ON	-	ON
25-40Vdc	24W	600mA	-	ON	ON	-
25-40Vdc	26W	650mA	-	ON	ON	ON
25-40Vdc	28W	700mA	ON	-	-	-
25-40Vdc	30W	750mA	ON	-	-	ON
25-40Vdc	32W	800mA	ON	-	ON	-
25-40Vdc	34W	850mA	ON	-	ON	ON
25-40Vdc	36W	900mA	ON	ON	-	-
25-40Vdc	38W	950mA	ON	ON	-	ON
25-40Vdc	40W	1000mA	ON	ON	ON	-
25-38Vdc	39.9W	1050mA	ON	ON	ON	ON

Technical information

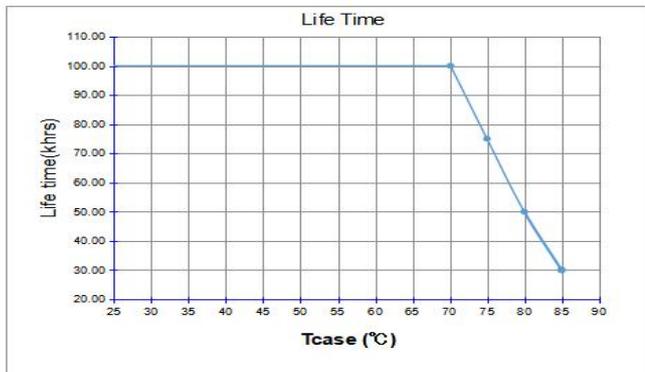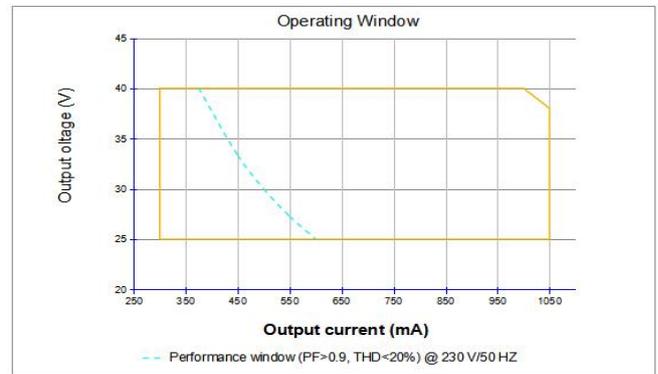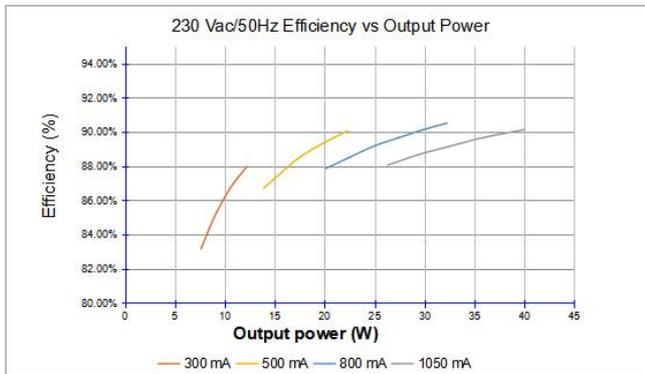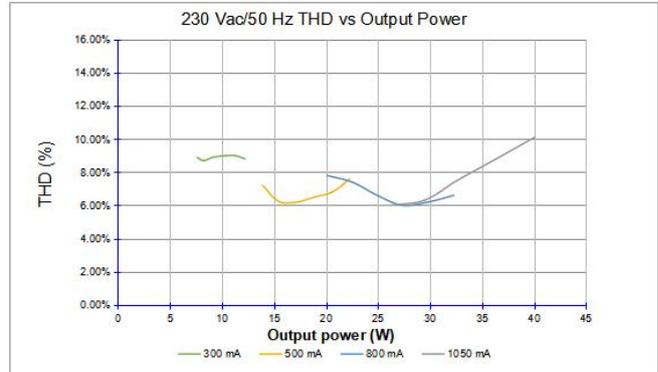

It's important to set the output current according to the LED voltage and make sure the power is within 40 W + 5%.

Example of AOC settings

V LED (Vdc)	AOC max	Pout (W)
40	300 mA	12
40	500 mA	20
40	1000 mA	40
38	1050 mA	39.9