


Product features

- Bluetooth dimming adjustable power LED driver
- Flicker-free LED driver
- Current adjustment via NFC
- Output current 300...1050 mA
- Max. output power 40 W
- Constant lumen output (CLO)
- For luminaires with protection class I, II
- 5 years warranty

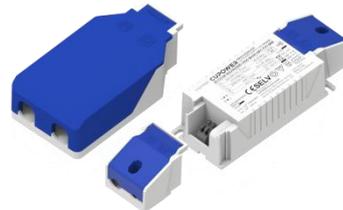

Product specifications

161003 ID CCCB 40/230/300-1050 BH30 NFC FV1

Output current	Input voltage	Output voltage	Efficiency @ full load	Current accuracy	Powerfactor	Dimension LxWxH (mm)
300 mA	220...240 Vac 220...240 Vdc	6...52 Vdc	87.5%	± 5%	0.9	97x43x30
500 mA		6...52 Vdc	88%			
750 mA		6...52 Vdc	89%			
1050 mA		6...38 Vdc	88.5%			

Electrical specifications

Mains voltage supply

Rated input voltage range	220...240 Vac
Max. input voltage range	198...264 Vac
Rated frequency range	0/50/60 Hz
Max. input current	0.3 A @ 230 Vac

Battery operation

DC voltage range	220...240 Vdc
Max. DC voltage range	176...276 Vdc

Protection against voltage peaks

Withstand voltage	I/p-O/p: 3.75 kVac, < 5 mA 60 sec
Mains surge immunity	L-N 1 kV

Total harmonic distortion (THD)

At rated input voltage range @ full load	10%
--	-----

Output data

Output current tolerance	± 5% at rated input voltage range
No load output voltage	59 Vdc
Ripple output current	5% (ripple = peak/average total 100 Hz)
Output PstLM	≤ 1 at full load @ rated input voltage
Output SVM	≤ 0.4 at full load @ rated input voltage

Protection functions output side

Overvoltage protection	The output voltage is less than or equal to 59 V
Overpower protection	The output power is less than or equal to 40W
Short circuit protection	Yes

Dimming operation and interface

Standby power consumption	0.5 W
---------------------------	-------

Connection terminals

Connection terminal type	45° push in terminal
Wire cross section	Input wire: 0.5...1.5 mm ² ; Output wire: 0.2...1.5 mm ²
Wire stripping length	8...9 mm

Degree of protection

Protection rating	IP20
-------------------	------

Operating data

Output current range	NFC control adjusts the current: 300...1050 mA
Default current	300 mA
Output voltage range	6...52 Vdc
Noise level	< 20 dB, at full load @ 100 cm distance

Circuit breaker / Inrush current

MCB loading quantity	Inrush current I _{peak} : 5.24 A			Inrush current T _{width} : 48 μs	
	MCB type	B10	C10	B16	C16
	Units	38	38	61	61

Supplementary instructions

- The luminaire manufacturer is responsible for measuring and verifying the EMI compliance of the complete luminaire, as the level of radio interference will vary depending on the luminaire construction. Especially primary and secondary cable lengths and their routing may have a significant effect on radio interference.
- Short circuit protection: Hiccup mode. Protection device will trigger when short circuit and will auto recover after the fault mode is removed

Environmental specifications

Operating temperature	-20...+50°C
Storage temperature	-25...+85°C
Working humidity	10%...90%
Store humidity	5%...95%
Lifetime	at Tc 90°C: 50,000 hrs; at Tc 80°C: 100,000 hrs @ 230 Vac
Maximum Tc temperature	90°C

Safety & EMC compliance

ENEC+CE



CCC

SAA



Accessories (optional)



Art. 161195 XZ-ID-A



Art. 160679 XZ-ID-LOOP-A



Dimensions	Length (mm)	Width (mm)	Height (mm)
XZ-ID-A	38	34	30
XZ-ID-LOOP-A	113.4	57.2	30
Driver incl. 2 x XZ-ID-A	143	43	30
Driver incl. XZ-ID-A + XZ-ID-LOOP-A	218.6	57.2	30


Dimensions

Housing dimensions


Length (L)	97 mm
Width (W)	43 mm
Height (H)	30 mm
Weight	0.116 kg

Packaging details

Packing units	24 pcs
Carton size	212 x 137 x 139 mm
Weight	3.8 kg




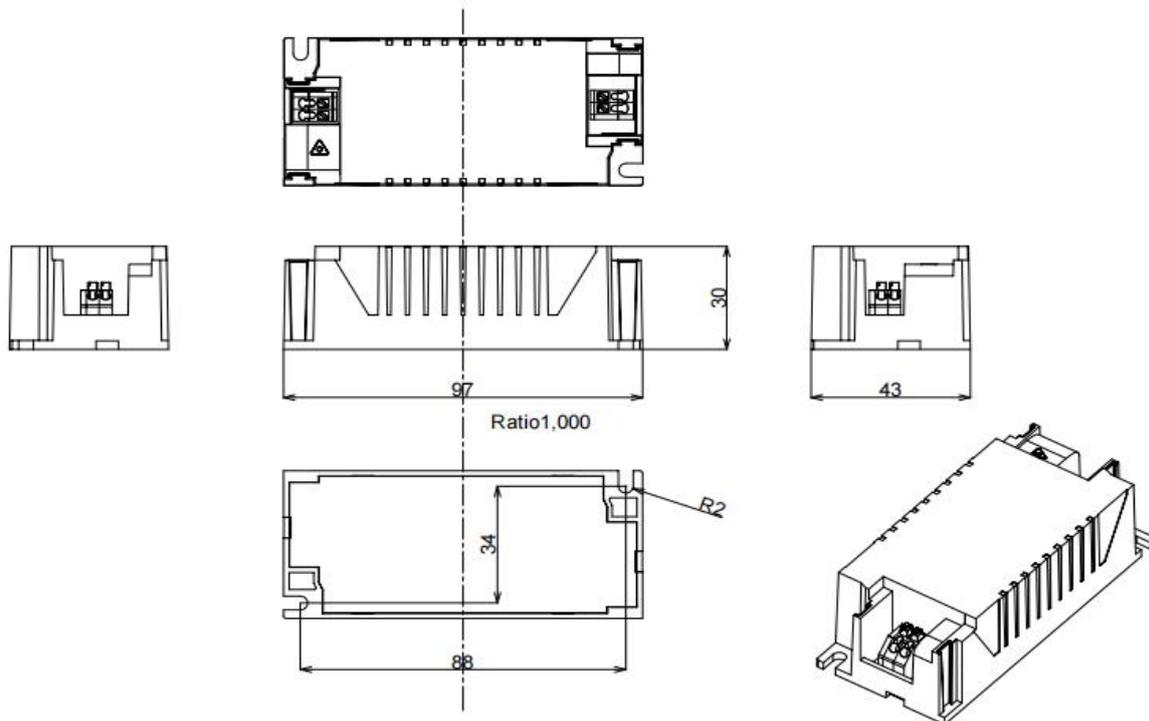


Wiring diagram

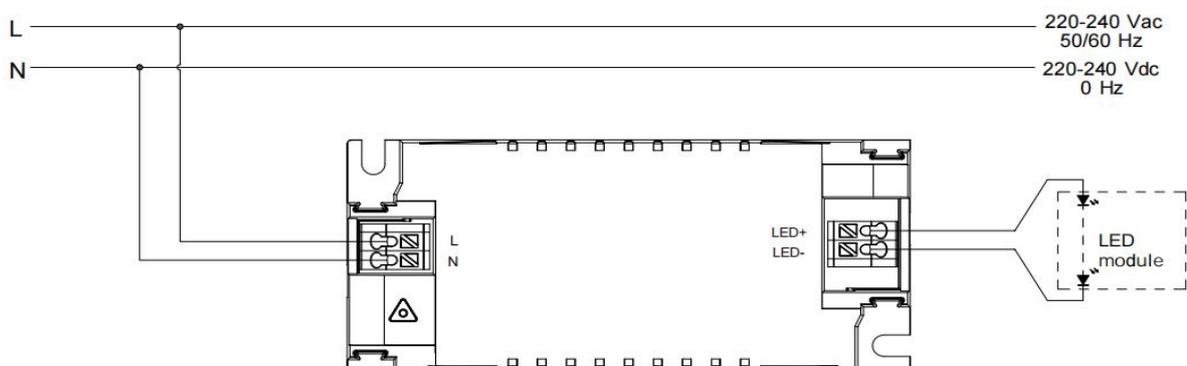

- All connections must be as short as possible to ensure good EMI performance.
- The luminaire wire should keep a certain distance from the LED power supply and other wires (5...10 cm is preferred).
- No secondary switches are allowed.
- Incorrect wiring can damage the LED.
- The wire must be well protected against short circuits.

Technical information

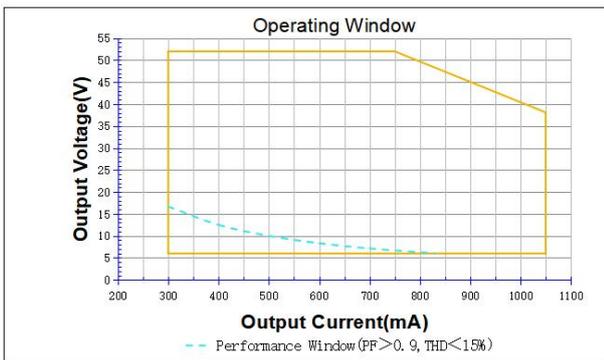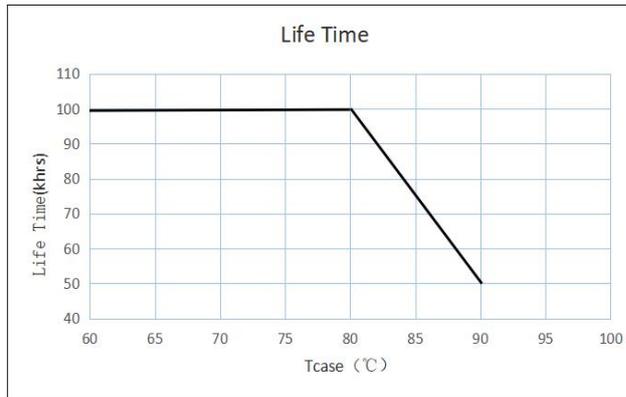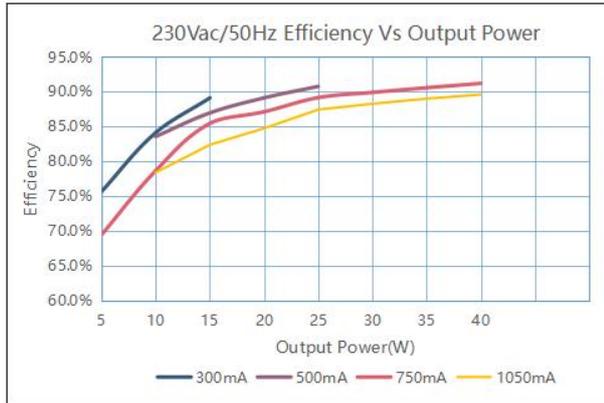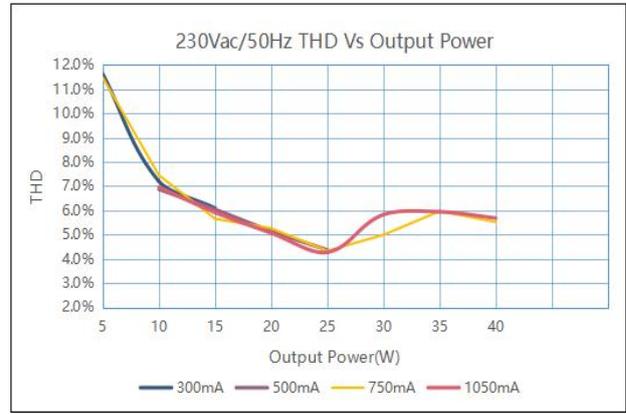

It's important to set the output current (AOC value) according to the LED voltage and make sure the power is within 40 W + 5%.

Example of AOC settings

V LED (Vdc)	AOC max	Pout (W)
52	300 mA	15.6
52	500 mA	26
52	750 mA	39
38.1	1050 mA	40