

### Product features

- Independent isolated adjustable power color temperature LED driver
- Flicker-free LED driver
- DIP control adjusts the current
- Output current 600...900 mA by DIP switch adjust
- Max. output power 36 W
- For luminaires with protection class II
- 5 years warranty



### Product specifications

161560 XZ-YL36B-400090-D

Output current	Input voltage	Output voltage	Efficiency @ full load	Current accuracy	Power factor	Dimension LxWxH (mm)
600 mA	220...240 Vac	30...40 Vdc	87.5%	± 5%	0.9	133x40.5x26
700 mA			88%			
800 mA			88.5%			
900 mA			88.5%			

### Electrical specifications

#### Mains voltage supply

Rated input voltage range	220...240 Vac
Max. input voltage range	198...264 Vac
Rated frequency range	50/60 Hz
Max. input current	0.24 A @ 230 Vac

#### Protection against voltage peaks

Withstand voltage	I/p-O/p: 3.75 kVac, < 5 mA 60 sec
Mains surge immunity	L-N 1 kV

#### Total harmonic distortion (THD)

At rated input voltage range @ full load	15%
--	-----

#### Output data

Output current tolerance	± 5% at rated input voltage range
No load output voltage	55 Vdc

Ripple output current	5% (ripple = peak/average total 100 Hz)
Output PstLM	≤ 1 at full load @ rated input voltage
Output SVM	≤ 0.4 at full load @ rated input voltage

### Protection functions output side

Short circuit protection	Yes
--------------------------	-----

### Connection terminals

Connection terminal type	45° Push in terminal
Wire cross section	Input wire: 0.75...1.5 mm <sup>2</sup> , Output wire: 0.5...1.5 mm <sup>2</sup>
Wire stripping length	8...9 mm

### Degree of protection

Protection rating	IP20
-------------------	------

### Operating data

Set output current	DIP switch adjusts the current: 600-900 mA
Default current	600 mA
Output voltage range	30...40 Vdc
Noise level	< 20 dB, at full load @ 100 cm distance

### Circuit breaker / Inrush current

	Inrush current I <sub>peak</sub> : 14.4A			Inrush current Twidth: 235 μs	
MCB loading quantity	MCB type	B10	C10	B16	C16
	Units	18	31	30	50

## Supplementary instructions

- The luminaire manufacturer is responsible for measuring and verifying the EMI compliance of the complete luminaire, as the level of radio interference will vary depending on the luminaire construction. Especially primary and secondary cable lengths and their routing may have a significant effect on radio interference.

## Protection

- Over voltage protection: Hiccup mode. Protection will trigger when load voltage exceed specified output voltage and will auto recover after the fault mode is removed.
- Short circuit protection: Hiccup mode. Protection device will trigger when short circuit and will auto recover after the fault mode is removed.




### Dimensions

#### Housing dimensions


Length (L)	133 mm
Width (W)	40.5 mm
Height (H)	26 mm
Weight	0.102 kg

#### Packaging details

Packing units	100 pcs
Carton size	415 x 276 x 163 mm
Weight	10.42 kg

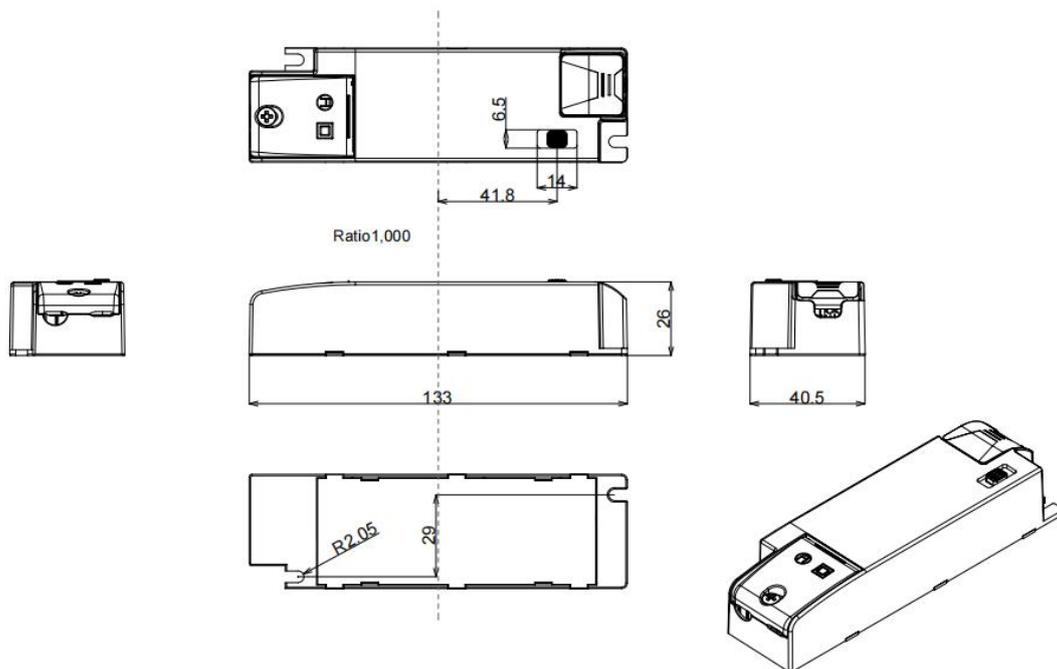


### Wiring diagram

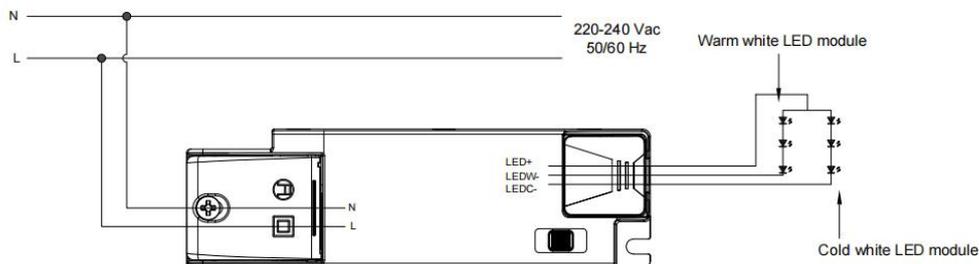

- All connections must be as short as possible to ensure good EMI performance.
- The luminaire wire should keep a certain distance from the LED power supply and other wires (5...10 cm is preferred).
- No secondary switches are allowed.
- Incorrect wiring can damage the LED.
- The wire must be well protected against short circuit.

### Adjustable output current with dip-switch

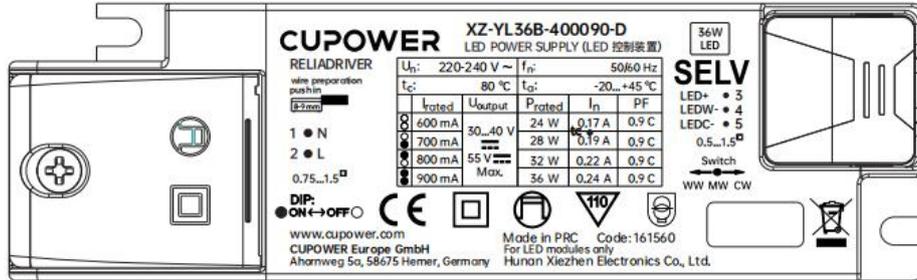

I <sub>out</sub>	1	2
600 mA	OFF	OFF
700 mA	ON	OFF
800 mA	OFF	ON
900 mA	ON	ON

### Technical information

