


### Product features



- Isolated adjustable power LED driver
- Support DALI-2, Push Dimming
- Output current 100-450 mA by DIP Switch adjust
- Current output default value 100%
- Max. output power 20 W
- For luminaries of protection class I, II
- 5-year warranty
- DC emergency
- Constant lumen output(CLO)

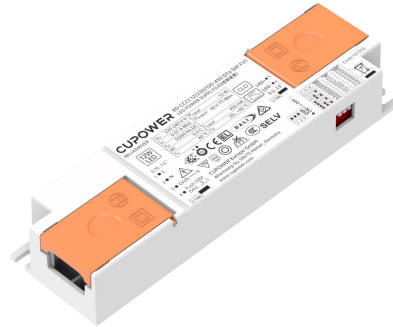

### Product specifications

#### 161355 RD CCCI 12/230/100-450 DT6 DIP FV1

Output current	Input voltage	Output voltage	Efficiency @full	Current accuracy	Power factor	Dimension LxWxH (mm)
100 mA	220...240 Vac 220...240 Vdc	9...42 Vdc	82.5%	± 5%	0.9 (Output power > 6.5 W @ 230 Vac 50 Hz)	133x38x21
150 mA						
200 mA						
250 mA						
300 mA						
350 mA						
400 mA						
450 mA						

### Electrical specifications

#### Mains voltage supply

Rated input voltage range	220...240 Vac
Max. input voltage range	198...264 Vac
Rated frequency range	0/50/60 Hz
Max. input current	0.07 A @ 230 Vac

#### Battery operation

DC voltage range	220...240 Vdc
Max. DC voltage range	176...276 Vdc

#### Protection against voltage peaks

Withstand voltage	I/P-O/P: 3.75 kVac, <5 mA 60 sec, I/P-DA: 1.5 kVac, <5 mA 60 sec, O/P-DA: 1.5 kVac, <5 mA 60 sec
Mains surge immunity	L-N 1kV

### Total harmonic distortion (THD)

At rated input voltage range @ full load	10%
--	-----

### Output data

Output current tolerance	± 5% at rated input voltage range
No load output voltage	50 Vdc
Ripple output current	5%(ripple = peak/average total 100 Hz)
Output PstLM	≤ 1 at full load @ rated input voltage
Output SVM	≤ 0.4 at full load @ rated input voltage

### Protection functions output side

Overvoltage protection	The output voltage is less than or equal to 50 V
Overpower protection	The output power is less than or equal to 14 W

### Dimming operation and interface

Standby power consumption	≤ 0.5W
---------------------------	--------

### Connection terminals

Connection terminal type	45° push in terminal
Wire cross section	Input wire: 0.75 - 1.5 mm <sup>2</sup> , Output wire: 0.2-1.5mm <sup>2</sup>
Wire stripping length	8-9 mm

### Degree of protection

Protection rating	IP20
-------------------	------

### Operating data

Output current range	DIP control adjusts the current: 100...450 mA
Default current	100 mA
Output voltage range	9...42 Vdc

### Circuit breaker / Inrush current

MCB loading quantity	Inrush current I <sub>peak</sub> : 4.15 A			Inrush current T <sub>width</sub> : 36 μs	
	MCB type	B10	C10	B16	C16
	Units	131	131	210	210

## Supplementary instructions

- The luminaire manufacturer is responsible for measuring and verifying the EMI compliance of the complete luminaire, as the level of radio interference will vary depending on the luminaire construction. Especially primary and secondary cable lengths and their routing may have a significant effect on radio interference.
- For the push DIM function, please follow our instructions, which can be downloaded from [www.cupower.com](http://www.cupower.com).

### Environmental specifications

Operating temperature	-20...+45°C
Storage temperature	-25...+85°C
Working humidity	10%...90%
Store humidity	5%...95%
Lifetime	at Tc 80°C: 50,000 hrs @ 230 Vac
Maximum Tc temperature	80°C

### Safety & EMC compliance

ENEC+CE	
EN 61347-1:2015/A1:2021	
EN 61347-2-13:2014/A1:2017	
EN IEC 62384:2020	
EN IEC 55015:2019/A11:2020	
EN IEC 61547:2023	
EN IEC 61000-3-2:2019/A1:2021	
EN 61000-3-3:2013/A2:2021	
EN62493:2015/A1:2022	

CCC	
GB17625.1-2022	
GB/T17743-2021	
GB19510.1-2009	
GB19510.14-2009	

SAA	
AS/ 61347.2.13:2018	
AS/NZS 61347.1:2016+ A1 Lamp Control Gear- Part 2-13	


### Dimensions

#### Housing dimensions


Length (L)	133 mm
Width (W)	38 mm
Height (H)	21 mm
Weight	0.069 kg

#### Packaging details

Packing units	86 pcs
Carton size	352 x 276 x 138 mm
Weight	6.1 kg





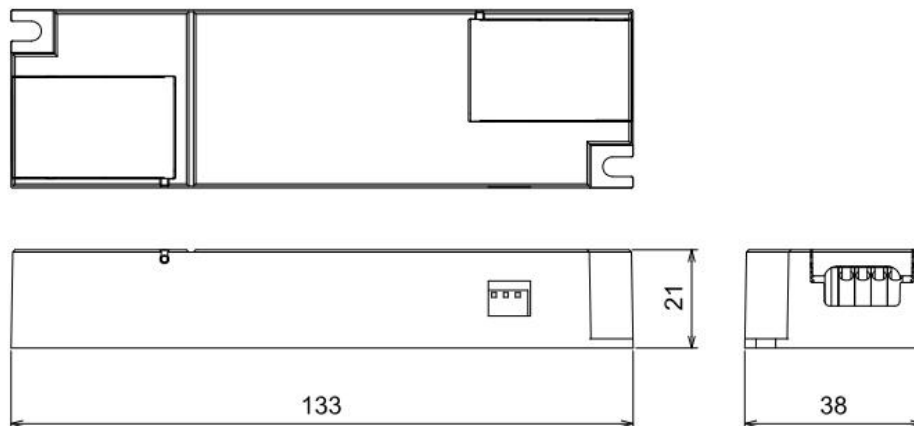


### Wiring diagram

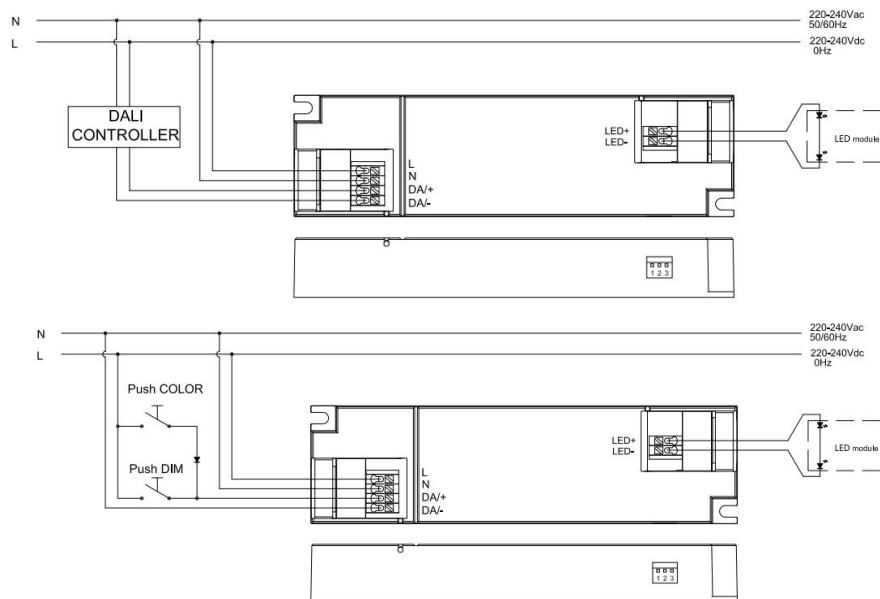

- All connections must be as short as possible to ensure good EMI performance.
- The luminaire wire should keep a certain distance from the LED power supply and other wires (5 - 10 cm is preferred).
- No secondary switches are allowed.
- Incorrect wiring can damage the LED.
- The wire must be well protected against short circuits.

### Technical information

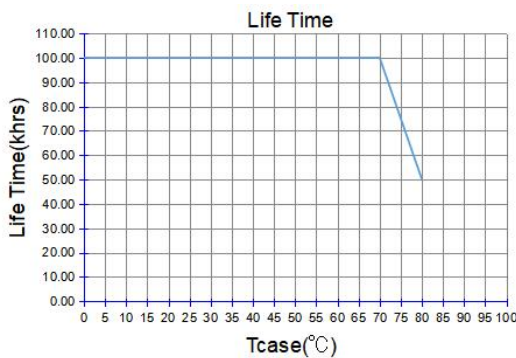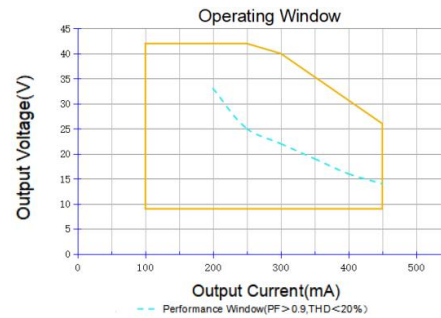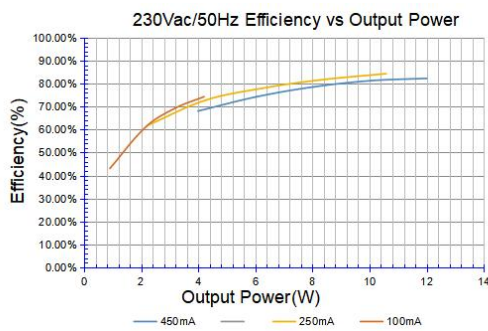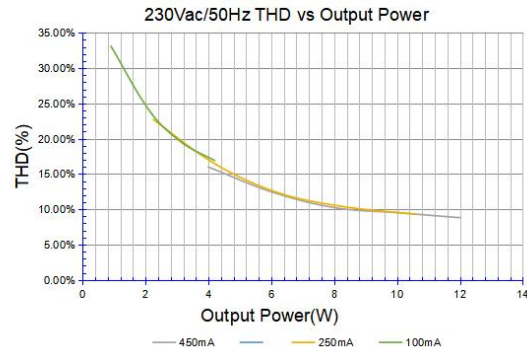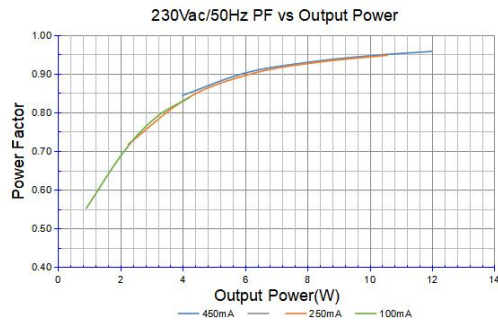

AOC settings					
Vout	Pout	Iout	1	2	3
9-42 Vdc	4.2 W	100 mA	-	-	-
9-42 Vdc	6.3 W	150 mA	-	-	ON
9-42 Vdc	8.4 W	200 mA	-	ON	-
9-42 Vdc	10.5 W	250 mA	-	ON	ON
9-40 Vdc	12 W	300 mA	ON	-	-
9-34 Vdc	11.9 W	350 mA	ON	-	ON
9-30 Vdc	12 W	400 mA	ON	ON	-
9-26 Vdc	11.7 W	450 mA	ON	ON	ON