


Product features

- Integrated wireless module for wireless ecosystem
- 4 ways button interface for controlling wireless-capable devices within wireless networks
- Wide voltage 100...277 Vac input
- Suitable for installation in a flush-mounted box
- 5 years warranty



Electrical specifications

Mains voltage supply

Rated input voltage range	100...277 Vac
Max. input current	0.05 A @ 100 Vac
RF transmit power	+ 8 dBm
Wireless frequency	2.4 GHz
Wireless range (open air)	50 m

Environmental specifications

Operating temperature	-20...+55 °C
Storage temperature	-25...+85 °C
Working humidity	0 %...80 %
Store humidity	0 %...95 %
Lifetime	at Tc 65 °C: 50,000 h @ 100 Vac
Maximum Tc temperature	65 °C
Lifetime Rating	50,000 h
Moisture and Dust Rating	IP20

Dimensions


Housing dimensions

Length (L)	80.7 mm
Width (W)	30.0 mm
Height (H)	15.0 mm

For all dimensions: values in mm; tolerances: ± 0.2 mm

Packaging details


Packing units	72 pcs.
Carton size	193 × 172 × 111 mm
Carton weight	1.9 kg
Product weight	0.022 kg

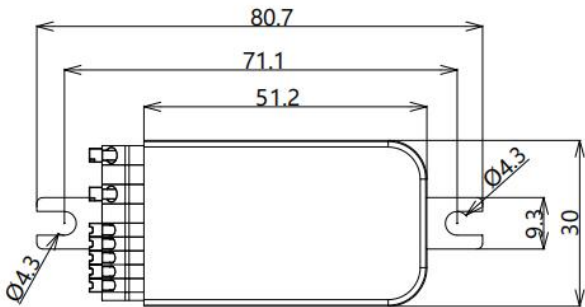

Ratio 1,000



unit: mm
tol: ± 0.2 mm

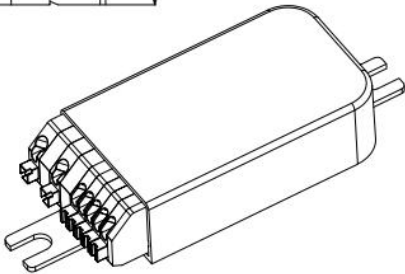

Applicable wiring diagram

