XZ-SC60B-380150-130110090-H Art. 164387

Product features

- 0-10 V adjustable power color temperature LED driver
- Flicker LED driver
- 12 V 0.1 A Auxiliary source
- Output current 900...1500 mA
- Max. output power 57 W
- For luminaires with protection class I
- 5 years warranty



Product specifications

164387 XZ-SC60B-380150-130110090070-H

Output current	Input voltage	Output voltage	Efficiency @ full load	Current accuracy	Power factor	Dimension LxWxH (mm)
1500 mA			88.5%			
1300 mA	- 120 Vac	20, 20, 1/4-	89%			
1100 mA			89%			
900 mA			89%	. 50/	0.0	070-07-40 7
1500 mA		3038 Vdc	89%	± 5%	0.9	270x27x19.7
1300 mA		-	89%			
1100 mA			88.5%			
900 mA			88%			

Electrical specifications

Mains voltage supply

Rated input voltage range	120277 Vac
Max. input voltage range	108305 Vac
Rated frequency range	50/60 Hz
Max. input current	0.7 A @ 120 Vac

Protection against voltage peaks

Withstand voltage	l/p-O/p: 1.8 KVac, < 5 mA 60 s; l/p-FG: 1.8 KVac, < 5 mA 60 s l/p-DIM: 1.8 KVac, < 5 mA 60 s; DIM-FG: 0.6 KVac, < 5 mA 60 s O/p-FG: 0.6 KVac, < 5 mA 60 s
Mains surge immunity	L-N 1kV, L-FG 2 kV, N-FG 2 kV

Total harmonic distortion (THD)

At rated input voltage range @ full load	20%	

Hunan Xiezhen Electronics Co., Ltd. Block A&B, Building 11, Innovation Park Linyi Road, BailLutang Town Suxian District, Chenzhou, Hunan - China CUPOWER Europe GmbH Ahornweg 5a 58675 Hemer - Germany

XZ-SC60B-380150-130110090-H

Art. 164387

Output data

Output current tolerance	± 5% at rated input voltage range
No load output voltage	55 Vdc
Stroboscopic coefficient	30%
Inrush current	50 A at rated input voltage range @ full load
Turn-on Delay time	\leq 0.75 s at full load @ low rated input voltage, \leq 0.5 s at full load @ high rated Input voltage

Protection functions output side

Over voltage protection	Yes
Short circuit protection	Yes

Connection terminals

Connection terminal type	45° push in terminal
Wire cross section	Input and output wire: 16-24 AWG
Wire stripping length	89 mm

Operating data

Default current	900 mA
Output voltage range	3038 Vdc
Noise level	< 20 dB, at full load @ 100 cm distance

Supplementary instructions

- Meet FCC requirements, The power supply is used in combination with the terminal equipment as a part of the whole lamp. Because the EMC performance is affected by LED lamps and wiring, the terminal is set In case the manufacturer needs to reconfirm the EMC of the whole device.
- The outputs of drivers cannot be in paralleled.

Protection

- Over voltage protection: Hiccup mode. protection device will trigger when load voltage exceeds specified output voltage and will
 auto recover after the fault mode is removed.
- Short circuit protection: Hiccup mode. protection device will trigger when short circuit and will auto recover after the fault mode is removed.

XZ-SC60B-380150-130110090-H

Art. 164387

Environmental specifications

Operating temperature	-20+50°C
Storage temperature	-40+80°C
Working humidity	10%90%
Store humidity	5%90%
Lifetime	at Tc 65°C (Tc at CY3): 50,000 hrs
Maximum Tc temperature	70°C

Safety & EMC compliance

UL	CCC	SAA	
UL8750			
UL1310-CLASS 2			
CAN/CSA C22.2 No. 250.13			


Dimensions

Housing dimensions

Length (L)	270 mm
Width (W)	27 mm
Height (H)	19.7 mm
Weight	0.145 kg

Packaging details

00	
Packing units	60 pcs
Carton size	332 x 297 x 186 mm
Weight	9.7 kg

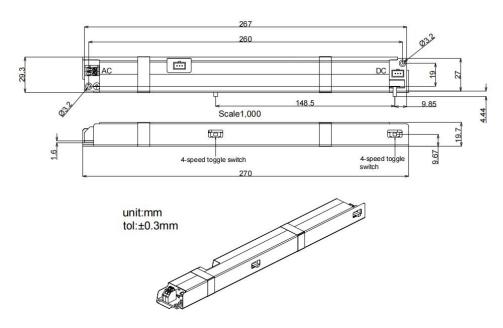


Hunan Xiezhen Electronics Co., Ltd. Block A&B, Building 11, Innovation Park Linyi Road, BailLutang Town Suxian District, Chenzhou, Hunan - China

CUPOWER Europe GmbH Ahornweg 5a 58675 Hemer - Germany page 3

XZ-SC60B-380150-130110090-H

Art. 164387

Wiring diagram

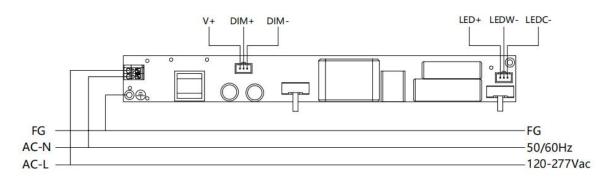


- All connections must be as short as possible to ensure good EMI performance.
- The luminaire wire should keep a certain distance from the LED power supply and other wires (5 10 cm is preferred).
- Incorrect wiring can damage the LED.
- The product must be well grounded.

XZ-SC60B-380150-130110090-H

Art. 164387

Technical information

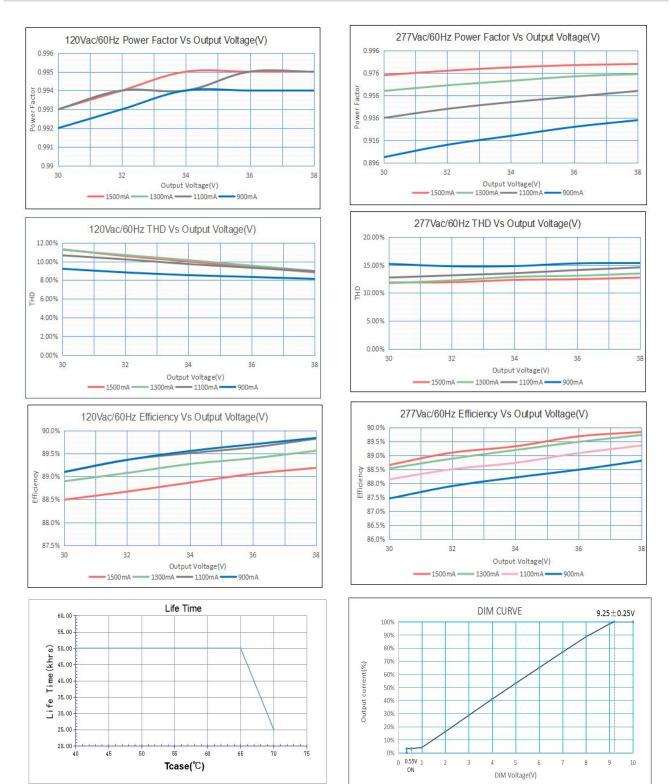

page 5

version: 202301202-1.1

Hunan Xiezhen Electronics Co., Ltd. Block A&B, Building 11, Innovation Park Linyi Road, BailLutang Town Suxian District, Chenzhou, Hunan - China CUPOWER Europe GmbH Ahornweg 5a 58675 Hemer - Germany