NASFF30-120277-600N-0-10V-WS

Art. 680040

Product features

- Built-in isolated adjustable power LED driver
- Current adjustment via NFC
- Support Bluetooth mesh
- Output current 100…600 mA
- Max. output power 31.2 W
- Flicker-free, dimming range 1%...100% (amplitude dimming)
- Current output default value 100%
- For luminaires with protection class I

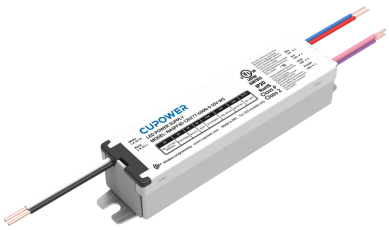

Product specifications

680040 NASFF30-120277-600N-0-10V-WS

Output current	Input voltage	Output voltage	Efficiency @ full load	Current accuracy	Power factor
100…600 mA	120…277 Vac	28…52 Vdc	88.5% (typical)	± 5%	0.9 (Output Power > 15 W)

Electrical specifications

Mains voltage supply	
Rated input voltage range	120…277 Vac; performance range
Max. input voltage range	108...305 Vac; operational safety range
Rated frequency range	50/60 Hz
Performance / Operational safety	47...63 Hz
Max. input current	0.32 A @ 120 Vac

Protection against voltage peaks	
Withstand voltage	I/p-O/p: 1.6 kVac, < 5 mA 60 s, I/p-Earth: 1.6 kVac, < 5 mA 60 s, O/p-Earth: 0.5 kVac, < 5 mA 60 s
Mains surge immunity	L-N 1 kV, L/N-earth 2kV per IEC 61000-4-5, 2.5 kV ring wave

Total harmonic distortion (THD)	
At rated input voltage range @ full load	≤ 20%

Output data	
Output current tolerance	± 5% at rated input voltage performance range
No load output voltage	≤ 60 Vdc
Ripple output current	5% (ripple = peak/average total 100 Hz)
Output PstLM	≤ 1 at full load @ rated input voltage
Output SVM	≤ 0.4 at full load @ rated input voltage

Preliminary Version

Hunan Xiezhen Electronics Co., Ltd.
Block A&B, Building 11, Innovation Park Linyi Road,
Bailutang Town Suxian District, Chenzhou, Hunan - China

CUPOWER Europe GmbH
Ahornweg 5a
58675 Hemer - Germany

CUPOWER North America, Inc.
655 Raco Dr. Suite A,
Lawrenceville, GA 30046 - USA

Version:20260307

Errors excepted. We reserve the right to make alterations in the interest of improving our products.

Protection functions output side

Overvoltage protection	The output voltage is less than or equal to 60 V
Overpower protection	The output power is less than or equal to 33 W
Short circuit protection	Hiccup mode. Protection device will trigger when short circuit and will auto recover after the fault mode is removed.

Dimming operation and interface

Dimming mode	0/1-10V (programmable)
Dimming method	Amplitude dimming
Dimming current range	1%...100% (6...600 mA)

Wiring

Input wire	UL1332, 18 AWG, 300 V, 200℃, black L, white N, wire exposed 5.9 ± 0.39 in (150 ± 10 mm), tinplating length 0.39 ± 0.04 in (10 ± 1 mm).
Output wire	UL1332, 20 AWG, 300 V, 200℃, red LED+, blue LED-, wire exposed 5.9 ± 0.39 in (150 ± 10 mm), tinplating length 0.39 ± 0.04 in (10 ± 1 mm).
DIM input wire	UL1332, 22 AWG, 300 V, 200℃, purple DIM+, pink DIM-, wire exposed 5.9 ± 0.39 in (150 ± 10 mm), tinplating length 0.39 ± 0.04 in (10 ± 1 mm).

Degree of protection

Protection rating	IP20

Operating data

Output current range	NFC control adjusts the current: 100…600 mA
Default output current	600 mA
Output voltage range	28…52 Vdc
Noise level	< 20 dB, at full load @ 100 cm distance

Circuit breaker / Inrush current

MCB loading quantity	Inrush current Ipeak: 12.9 A			Inrush current Twidth: 116 μs	
	MCB type	B10	C10	B16	C16
	Units	26	26	42	42

Preliminary Version

Hunan Xiezhen Electronics Co., Ltd.
Block A&B, Building 11, Innovation Park Linyi Road,
Bailutang Town Suxian District, Chenzhou, Hunan - China

CUPOWER Europe GmbH
Ahornweg 5a
58675 Hemer - Germany

CUPOWER North America, Inc.
655 Raco Dr. Suite A,
Lawrenceville, GA 30046 - USA

Version:20260307

www.cupower.com

Errors excepted. We reserve the right to make alterations in the interest of improving our products.

Supplementary instructions

- The luminaire manufacturer is responsible for measuring and verifying the EMI compliance of the complete luminaire, as the level of radio interference will vary depending on the luminaire construction. Especially primary and secondary cable lengths and their routing may have a significant effect on radio interference.
- The recommended NFC communication distance：5...15 mm.

Environmental specifications

Operating temperature	-20… +50°C
Storage temperature	-25… +85°C
Working humidity	10%…90%
Store humidity	5%…95%
Lifetime	at Tc 75°C: 50,000 hrs @ performance range (0.2% / 1,000 h failure rate)
Maximum Tc temperature	85°C

Safety & EMC compliance

UL
UL8750
CLASS P
CSA C22.2 NO. 250.13
CLASS 2

FCC
/

Preliminary Version

Hunan Xiezhen Electronics Co., Ltd.
Block A&B, Building 11, Innovation Park Linyi Road,
Bailutang Town Suxian District, Chenzhou, Hunan - China

CUPOWER Europe GmbH
Ahornweg 5a
58675 Hemer - Germany

CUPOWER North America, Inc.
655 Raco Dr. Suite A,
Lawrenceville, GA 30046 - USA

Version:20260307

www.cupower.com
Errors excepted. We reserve the right to make alterations in the interest of improving our products.

NASFF30-120277-600N-0-10V-WS

Art. 680040

Dimensions

Housing dimensions	
Length (L)	4.72 in (120.0 mm)
Width (W)	1.08 in (27.4 mm)
Height (H)	0.89 in (22.65 mm)

For all dimensions: values in in/mm; tolerances: ± 0.5 mm

Packaging details	
Packing units	56 pcs
Carton size	11.97 x 11.26 x 6.30 in (304 x 286 x 160 mm)
Carton weight	6.97 kg
Product weight	0.106 kg

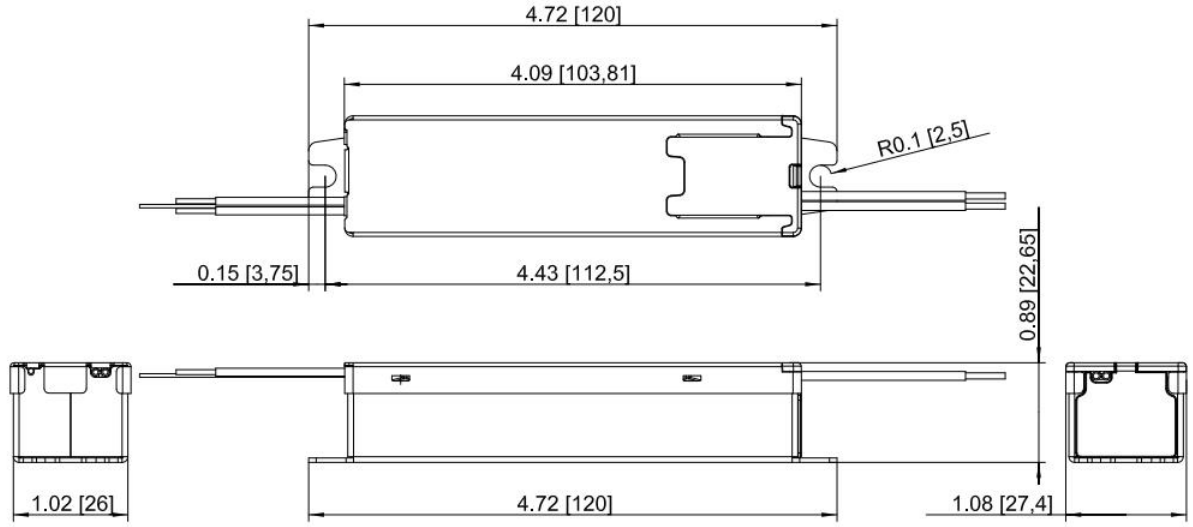

- All connections must be as short as possible to ensure good EMI performance.
- The luminaire wire should keep a certain distance from the LED power supply and other wires (5...10 cm is preferred).
- No secondary switches are allowed.
- Incorrect wiring can damage the LED.
- The wire must be well protected against short circuits.

Hunan Xiezhen Electronics Co., Ltd.
Block A&B, Building 11, Innovation Park Linyi Road,
Bailutang Town Suxian District, Chenzhou, Hunan - China

CUPOWER Europe GmbH
Ahornweg 5a
58675 Hemer - Germany

CUPOWER North America, Inc.
655 Raco Dr. Suite A,
Lawrenceville, GA 30046 - USA

Version:20260307

www.cupower.com

Errors excepted. We reserve the right to make alterations in the interest of improving our products.

Technical information

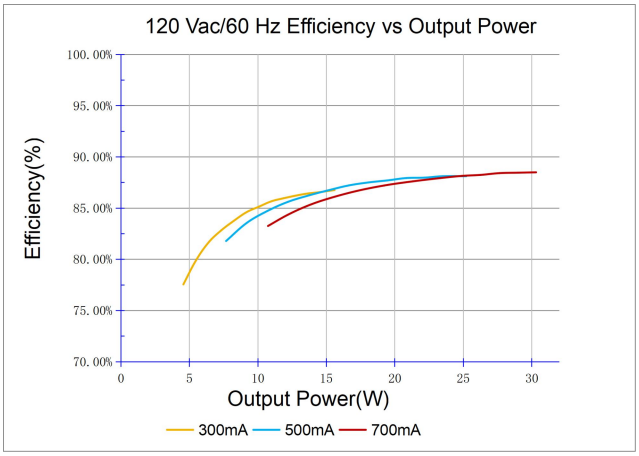

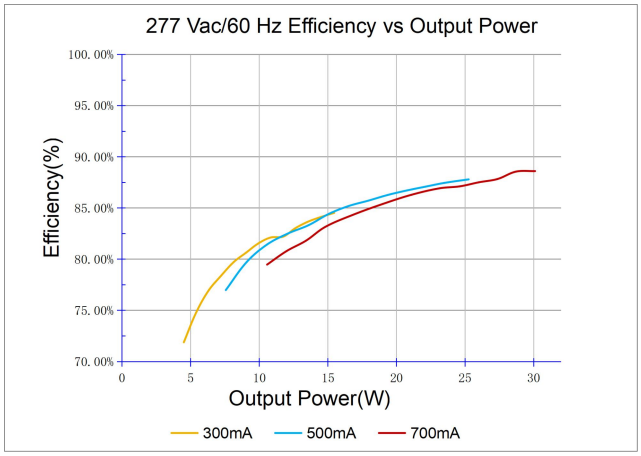

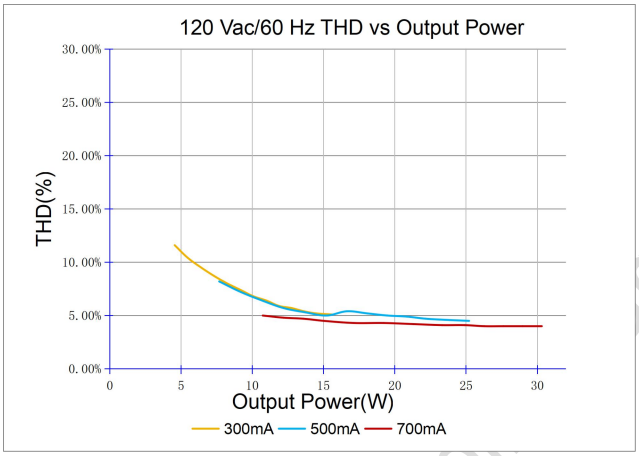

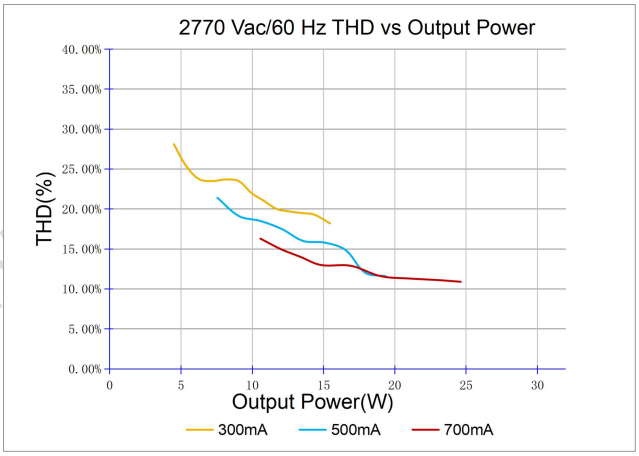

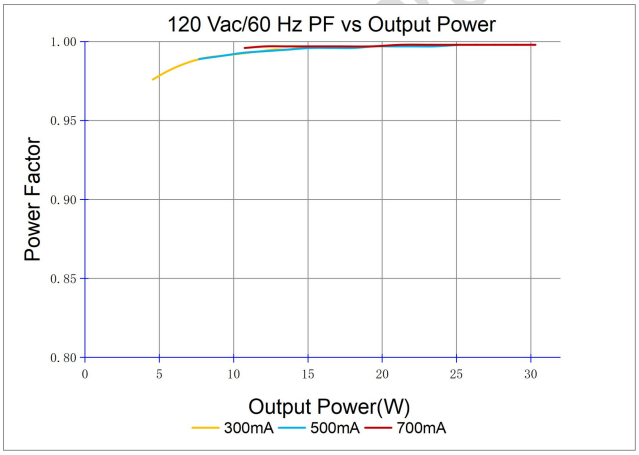

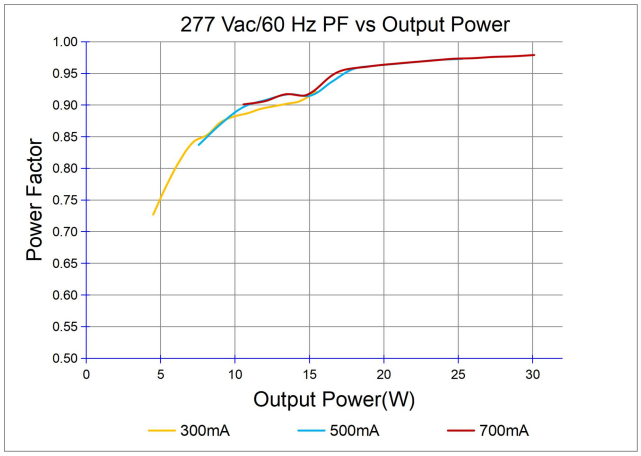

Hunan Xiezhen Electronics Co., Ltd.
Block A&B, Building 11, Innovation Park Linyi Road,
Bailutang Town Suxian District, Chenzhou, Hunan - China

CUPOWER Europe GmbH
Ahornweg 5a
58675 Hemer - Germany

CUPOWER North America, Inc.
655 Raco Dr. Suite A,
Lawrenceville, GA 30046 - USA

Version:20260307

www.cupower.com
Errors excepted. We reserve the right to make alterations in the interest of improving our products.

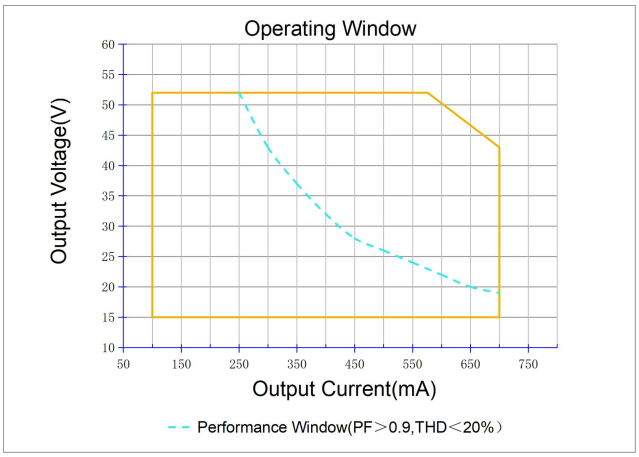

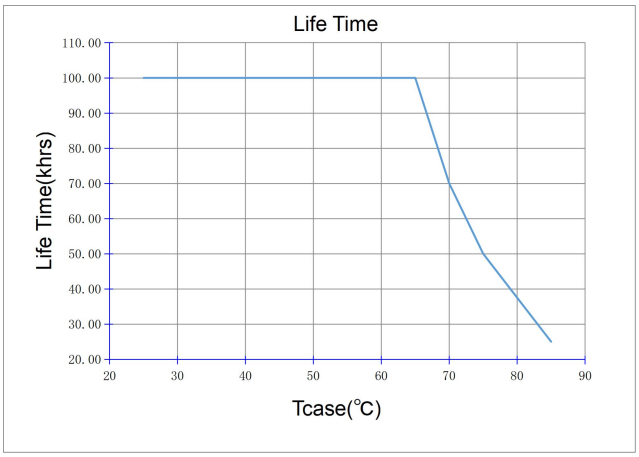

at Tc 75°C (0.2% / 1,000 h failure rate)

It's important to set the output current (AOC value) according to the LED voltage and make sure the power is within 31.2 W + 5%.

Example of AOC settings

V LED (Vdc)	AOC max	Pout (W)
52	600 mA	31.2

Preliminary Version

Hunan Xiezhen Electronics Co., Ltd.
Block A&B, Building 11, Innovation Park Linyi Road,
Bailutang Town Suxian District, Chenzhou, Hunan - China

CUPOWER Europe GmbH
Ahornweg 5a
58675 Hemer - Germany

CUPOWER North America, Inc.
655 Raco Dr. Suite A,
Lawrenceville, GA 30046 - USA

Version:20260307

www.cupower.com
Errors excepted. We reserve the right to make alterations in the interest of improving our products.